

**Corrugated sides tray
delivery & storage cabinet,
standard & heavy duty,
non-insulated, aluminum**

- **Well built cabinet for holding, storing or delivering food in various stages in 18"x26" sheet pans or 14"x18" trays.**
- **Lightweight, all aluminum construction.**
- **Available in standard duty and heavy duty models.**
- **N.S.F. listed.**



A must for every kitchen. Top & bottom are extra strong, heli-arc welded to the frame with additional reinforcing on the inside. Each cart comes with horizontal stabilizing bar at the front to prevent "racking". Other features include:

- **Top:** Made from inner & outer panels each 0.063" thick.
- **Bottom:** 0.190" thick formed into one piece.
- **Sides:** Made from 0.063" thick hi-tensile aluminum with corrugations spaced on 1 1/2" centers. Bun pans can be pulled out past the half way point without tipping over.
- **Uprites:** 2"x1"x0.125" specially extruded channels.
- **Back:** 0.063" aluminum welded to the top and deck to provide extra support.
- **Door:** 0.080" aluminum hemmed at all four sides with stainless steel hinges & gravity latch.
- **Casters:** 5"x1 1/4" deluxe, N.S.F. approved, all swivel.

HEAVY DUTY MODELS

- **Back:** 0.080" aluminum brake formed into "C" section at ends with extra vertical channel reinforcement in the middle. Additional horizontal stabilizing bar in the back is also provided.
- **Door:** Heavy duty reinforced door.




Heavy Duty
Model 9105-HD-1839

Type	Model No.	Pan Capacity	Pan Size (Inches)	Overall Dimension (Inches)			Shipping Weight (pounds)
				A Width	B Depth	C Height	
Standard Duty	9105-1839	39	18x26	22	30 1/8	69 3/8	116
	9105-1831	31	18x26	22	30 1/8	57 3/8	106
	9105-1822	22	18x26	22	30 1/8	42 3/8	96
	9105-1478	*78	14x18	22	32 3/8	69 3/8	124
	9105-1462	*62	14x18	22	32 3/8	57 3/8	114
	9105-1444	*44	14x18	22	32 3/8	42 3/8	104
Heavy Duty	9105-HD-1839	39	18x26	22	30 1/8	69 3/8	121
	9105-HD-1831	31	18x26	22	30 1/8	57 3/8	111

*Two trays side by side on each pair of corrugation.

Super Duty Models:

Double reinforced door, double tie rods and back reinforced with additional bracing (3/16" thick) fitted around rear uprites. For this style, add "-SD" after standard duty model numbers.



Options:

1. Four corner bumpers.
2. Wrap around bumper.
3. Swing door catch.
4. Lockable latch.
5. Wheel brakes.
6. Poly casters.
7. Door tag holder.
8. S/S construction.

Better food service equipment — standard models and custom designs.



SAMMONS EQUIPMENT MANUFACTURING CORPORATION Shammi Industries

390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419



Fax (951) 340-2716

Samobile tray delivery & storage cabinet, heavy duty, insulated & non-insulated, aluminum

- Heavy duty cabinet for holding or delivering food in various stages in 18"x26" sheet pans & 12"x20" steam pans.
- Stays sanitary with routine steam cleaning.
- Lightweight due to all aluminum construction, yet extremely rugged for long lasting service.
- Offered in both insulated and non-insulated models.

For today's needs in mind. Top & bottom are extra strong, heli-arc welded to the frame with additional reinforcing on the inside. Each cart comes with horizontal stabilizing bars to prevent "racking". Other features include:

- **Top:** Made from inner & outer panels each 0.063" thick.
- **Bottom:** 0.190" thick formed into one piece.
- **Sides:** 0.075" thick specially extruded aluminum panels with 0.100" thick horizontal tray slides on 1½" centers. Panels have interlocking inverted "V" seams which are further strengthened at the joints.
- **Uprites:** 2"x1"x0.125" specially extruded channels.
- **Back:** 0.080" aluminum, brake formed into "C" section at ends to join rear uprite channels with extra reinforcement in the middle.
- **Door:** 0.080" aluminum pan type, vertically reinforced in the middle with 1" square tubing.
- **Casters:** 5"x1¼" deluxe, N.S.F. approved, all swivel.
- **Hinges and Latches:** Heavy duty 12 GA. S/S latch.
- **Insulation:** Insulated models use 1" polyurethane board between inner and outer panels at top, bottom, side and back. Outer shell is 0.063" thick.

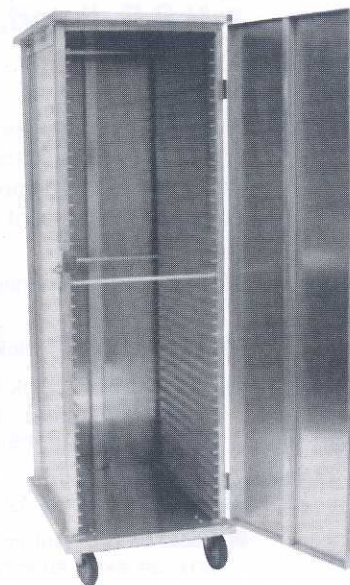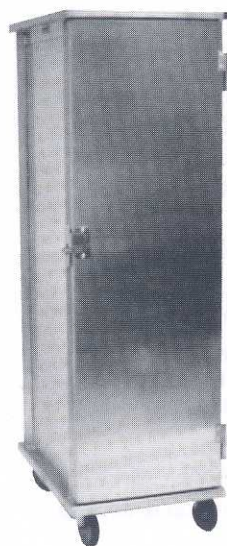

Model S-4285-39 (with optional lockable latch.)

Non-insulated models:

Model No.	Pan Capacity (18"x26")	Overall Dimension (Inches)			Shipping Weight (pounds)
		A Width	B Depth	C Height	
S-4285-39	39	22	30½	69½	124
S-4285-31	31	22	30½	57½	114
S-4285-23	23	22	30½	45½	104
*S-4285-36-12	*36	25	30½	69½	129
*S-4285-24-12	*24	25	30½	57½	119


*For 12"x20"x2½" steam pans (two per pair of slides)

Insulated models:

Model No.	Pan Capacity (18"x26")	Overall Dimension (Inches)			Shipping Weight (pounds)
		A Width	B Depth	C Height	
S-4285-39-IN	39	24	32	69½	188
S-4285-31-IN	31	24	32	57½	175
S-4285-23-IN	23	24	32	45½	162

Correctional package available. Consult factory.

NOTE: Non-insulated model S-4285-35 with 35 pan capacity (O.A. height 63 3/8") is also available. Consult factory.



Options:

1. Four corner bumpers.
2. Wrap around bumper.
3. Swing door catch.
4. Wheel brakes.
5. Polyurethane casters (5")
6. Door tag holders.
7. Lockable latch.
8. Balloon casters (6")

Better food service equipment — standard models and custom designs.



SAMMONS EQUIPMENT MANUFACTURING CORPORATION Shammi Industries

**Angle ledge tray delivery
& storage cabinet,
standard & heavy duty,
non-insulated, aluminum**

390-A Meyer Circle, Corona, California 92879-1078



Phone (951) 340-3419

Fax (951) 340-2716

- **Standard duty cabinet for holding, storing or delivering food in various stages in 18x26" sheet pans. Also available in heavy duty models.**
- **Stays sanitary with routine steam cleaning.**
- **N.S.F. listed.**

These cabinets allow bottom of the tray instead of the bead to ride on the angle ledge with standard 3" spacing. Top & bottom are extra strong, heli-arc welded to the frame with additional reinforcing on the inside. Each cart comes with horizontal stabilizing bar to prevent "racking". Other features include:

- **Top:** Made from inner & outer panels each 0.063" thick.
- **Bottom:** 0.190" thick formed into one piece.
- **Sides:** 0.063" thick with 1½"x1¾"x0.075" thick angle ledge slides spaced on 3" centers.
- **Uprites:** 2"x1"x0.125" specially extruded channels.
- **Back:** 0.063" aluminum.
- **Door:** 0.080" aluminum hemmed at all four sides with stainless steel hinges & gravity latch.
- **Casters:** 5"x1¼" deluxe, N.S.F. approved, all swivel.

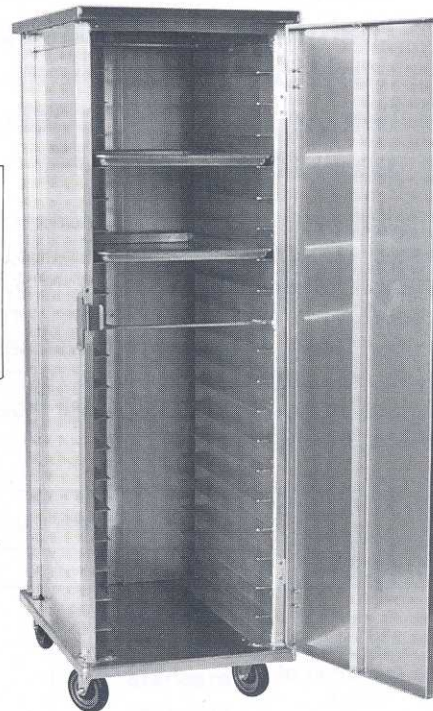

Model 9156-HD-1820



ADDITIONAL FEATURES FOR HEAVY DUTY MODELS:

- **Back:** 0.080" aluminum, brake formed into "C" section at ends with extra reinforcement in the middle.
- **Door:** 0.080" brake formed reinforced vertically in the middle with 1" square tubing. Furnished with heavy duty latch.

Type	Model No.	*Pan Capacity (18"x26")	Overall Dimension (Inches)			Shipping Weight (pounds)
			A Width	B Depth	C Height	
Standard Duty	9156-1820	20	22	30⅝	69⅝	124
	9156-1816	16	22	30⅝	57⅝	114
	9156-1812	12	22	30⅝	45⅝	104
Heavy Duty	9156-HD-1820	20	22	30⅝	69⅝	129
	9156-HD-1816	16	22	30⅝	57⅝	119
	9156-HD-1812	12	22	30⅝	45⅝	109

*Cabinets also available for different capacity and with spacing other than 3". Consult factory.

Super Duty Models:

Double reinforced door, double tie rods and back reinforced with additional bracing (⅜" thick) fitted around rear uprites. For this style, add "-SD" after standard duty model numbers.

Options:

1. Four corner bumpers.
2. Wrap around bumper.
3. Swing door catch.
4. Lockable latch.
5. Wheel brakes.
6. Poly casters.
7. Door tag holder.
8. Stainless steel construction.

Better food service equipment — standard models and custom designs.