

SAMMONS
EQUIPMENT
 MANUFACTURING CORPORATION
 Shammi Industries

Hot universal angle slide cabinets, insulated & non-insulated

390-A Meyer Circle, Corona, California 92879-1078


Phone (951) 340-3419

Fax (951) 340-2716

- Ideal for schools, institutions, hotels and hospitals.
- Easily accommodates various size pans and trays like 18"x26" buns pans, 12"x20" steam pans, gastronorm (GN 2/1 & GN 1/1) pans, 14"x18", 10"x20" and 20"x22" pans and 13^{3/8}"x20^{3/4}" school lunch baskets.
- Choice of insulated or non-insulated units.

These hi-tensile all*aluminum cabinets provide complete flexibility of mixing and matching different pans. Hot prepared food can be maintained at the proper holding temperature with an easily removable bottom mounted heating unit and the louvered air-tunnel at the back. An electrically operated blower circulates hot air throughout the interior of the cabinet at thermostatically controlled temperature. A water reservoir with an adjustable opening cover provides the necessary moisture. Cabinet rolls easily on 5" deluxe all swivel casters.

* Or stainless steel

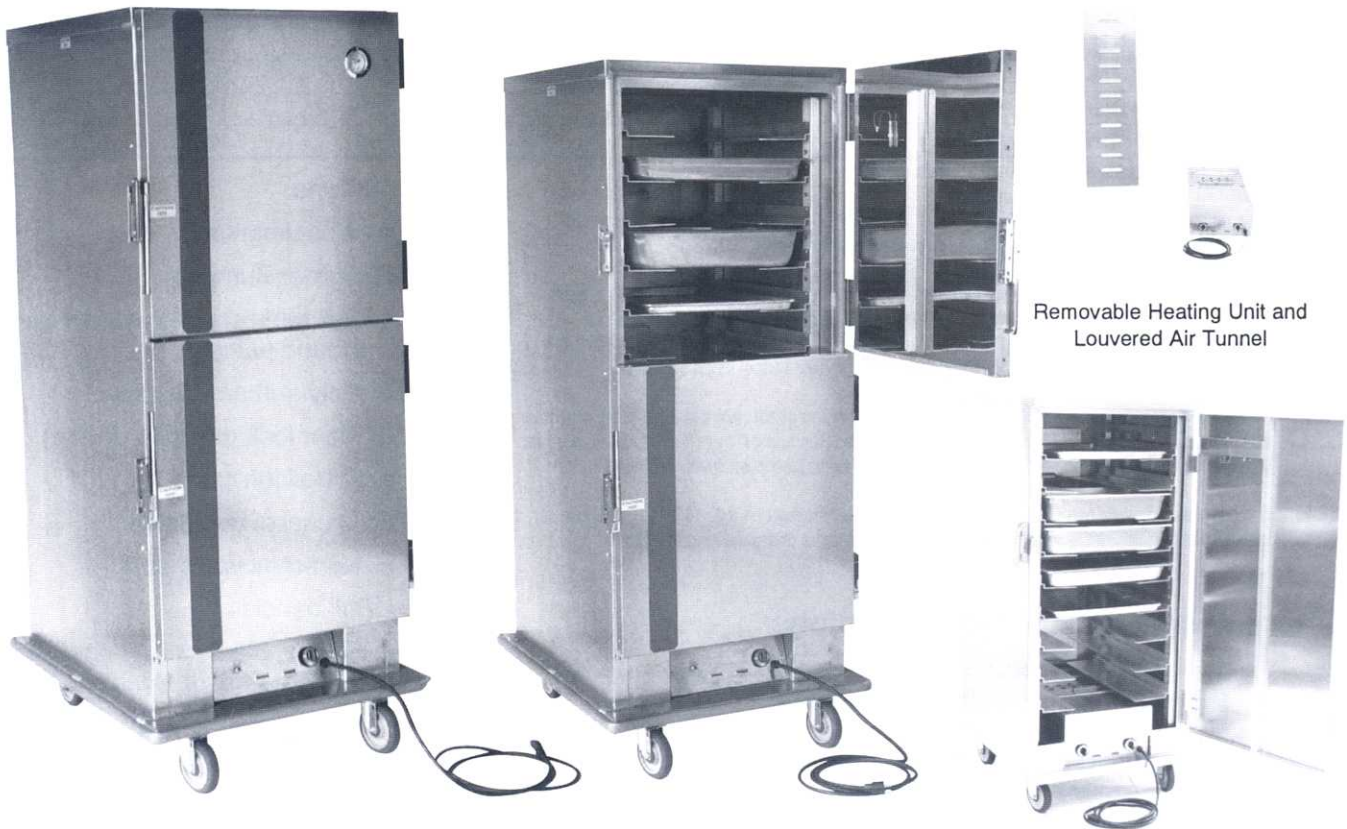

Insulated Model 9232-HIN-DD-UA-12 with Dutch Doors

Non Insulated Model
9230-H-UA-9



LISTED
C



Better food service equipment — standard models and custom designs.

C-7

HE-2000 Heating Unit:

2000W heating coil, 2075W total, 17.3 amps at 120 VAC, 60 Hz single phase, furnished with *20 amps cord, 8 ft. long with 3 prong Nema 5-20P grounding plug. An off-on switch, a 75W blower, full range thermostat and power and heating pilot lights are standard. Unit has over 4 quarts capacity water reservoir with adjustable opening cover. Blower and heating coils are thermally protected. The unit is easily removable without the help of any tools. Optional 220-240V available.

Note: Optional **HE-1600** heating unit in lieu of **HE-2000**, with *15 amps service and 1600W heating coil is available for insulated cabinets at no extra charge. Consult factory.

*For Canadian application, **HE-2000** is furnished with 30 amps cord and plug and **HE-1600** is furnished with 20 amps cord and plug. Consult factory.

Thermometer: Through the door type with dial on the outside for easy reading of temperature without opening the door.

Aluminum Heated Cabinets with Universal Angle Slides (also see notes 3 & 4)

Type	Model Number (Also see note 3)	Tray Capacity (Note 1 & 2)	Pan Spacing (Inches)	O.A. Dimensions (Inches)			Weight (Pounds)
				W	D	H	
Non-Insulated	9230-H-UA-9	9	4½	26	31	59½	160
	9230-H-UA-10	10	4½	26	31	65½	170
	9230-H-UA-11	11	4½	26	31	70	185
Insulated	9232-HIN-UA-9	9	4½	29½	36¼	60½	265
	*9232-HIN-DD-UA-12	12	4½	29½	36¼	72½	295

Stainless Steel Heated Cabinets with Universal Angle Slides (also see notes 3 & 4)

Type	Model Number (Also see note 3)	Tray Capacity (Note 1 & 2)	Pan Spacing (Inches)	O.A. Dimensions (Inches)			Weight (Pounds)
				W	D	H	
Non-Insulated	2230-H-UA-9	9	4½	26	31	59½	252
	2230-H-UA-11	11	4½	26	31	70	280
Insulated	2232-HIN-UA-9	9	4½	29½	36¼	60½	378
	2232-HIN-UA-12	12	4½	29½	36¼	72½	402
	*2232-HIN-DD-UA-12	12	4½	29½	36¼	72½	410

*Furnished with dutch doors as standard on this model.

NOTE 1: Tray capacity is shown for 18"x 26" bun pans. Capacity for 12"x 20" steam pans/gastronorm (GN1/1) pans (2½" or 4" high) or 14"x 18" trays is twice the number.

NOTE 2: Slides are adjustable on 1½" (38mm) centers. Each universal slide set can carry one (1) Each 18"x 26" bun pan or 20"x 20" baking pan or 530mm x 650mm gastronorm (GN2/1) pan or 20"x 20" glass rack or two (2) each 12"x20" steam pans or 325mm x 530mm gastronorm (GN1/1) pan or 14"x 18" trays or 10"x 20" roasting pans or 13¾"x 20¾" school lunch baskets.

NOTE 3: These cabinets are also available as proofing cabinets in lieu of hot cabinets at no extra charge or as hot/proof combination cabinets at an additional price. Replace -H" by "-P" in model number for proofing cabinets or replace "-H" by "-HP" for hot/proof combination cabinets. Consult Factory.

NOTE 4: Hot insulated cabinets can also be furnished with 1600w heating unit (HE-1600) for 15 amps service instead of standard 2000w heating unit (HE-2000) at no extra charge. Consult factory.

Other general/ common specifications:

- **Non-insulated models:** sides, back, top and door are made of 0.080" aluminum or 18 ga. S/S with doors reinforced with 1" square tube.
- **Insulated models:** Sides, back, top and door are double wall construction 0.063" aluminum or 22 ga. inner and 20 ga. outer S/S, insulated with 1½" fiberglass insulation.
- **Common:** Deck is made of 0.190"/ 0.125" thick reinforced aluminum or 14 ga. S/S. Uprites are 2"x 1"x 1/8" aluminum channels fixed for non-insulated and removable for insulated models. Slides are 0.105" aluminum step angle universal type, adjustable on 1½" centers. 5"x 1¼" N.S.F listed casters are standard.

Options:

- A. Wheel brakes
- B. Corner Bumpers
- C. Full perimeter non-marking wrap around bumper.
- D. Polyurethane casters.
- E. Floor lock (car stop device)
- F. 6" Balloon casters
- G. Lockable door latch
- H. Non-removable door
- I. Pull handles
- J. Removable rack for non-insulated models. (std. or insulated cabinets)
- K. Dutch doors (std. On 72½"H insulated cabinets
- L. 220-240V Application
- M. Canadian application
- N. S/S inner door and magnetic gasket
- O. All S/S construction (consult factory)
- P. 10 Hour timer
- Q. Digital thermometer
- R. S/S uprites and slides.
- S. Correctional package.

SAMMONS EQUIPMENT MANUFACTURING CORPORATION

Shammi Industries

390-A Meyer Circle, Corona, California 92879-1078

Hot cabinets, insulated
& non-insulated,
aluminum & stainless steel

Phone (951) 340-3419

Fax (951) 340-2716

- Heavy duty hot cabinets for keeping food hot or for warming rolls and china in 18"x26" sheet pans or 14"x18" trays.
- Choice of extruded sides, corrugated sides, angle ledge or channel slides.
- Available in either insulated or non-insulated models.

These hot cabinets allow transporting and holding of pre-prepared food away from central kitchen and close to the actual serving area. Ideal for banquets or catering operations. These are equally suited for fast food operations. A wide selection is available. A bottom mounted heating unit and a louvered or perforated air tunnel attached at the back of full height cabinet are lift-off type and are easily removable. The hot air is forced up the tunnel by an electrically operated blower and circulated throughout the cabinet interior. Temperature is controlled thermostatically. A water reservoir and an optional perforated cover with adjustable openings provide the desired moisture as necessary to prevent dryness. Cabinets roll easily on 5" casters.

Hot Insulated Cabinet



LISTED



LISTED



Hot Insulated Cabinet with Channel Slides
Model 9252-HIN-DD-1834
(with optional push handles)



Hot Extruded Sides Cabinet
Model 9250-H-1834



Hot Corrugated Sides Cabinets
Model 9270-H-1834

Hot Non-Insulated Cabinets



Hot Angle Slide Cabinet
Model 9280-H-1817

HE-2000 Heating Unit: 2000W Heating coil, 2075W total, 17.3 amps at 120 VAC, 60 Hz single phase, furnished with *20 amps cord, 8 ft. long with 3 prong Nema 5-20P grounding plug. An off-on switch, a 75W blower, full range thermostat and power and heating pilot lights are standard. Unit has over 4 quarts capacity water reservoir with optional adjustable opening cover. Blower and heating coils are thermally protected. The unit is easily removable without the help of any tool. Optional 220-240V available.

Thermometer: Through the door type with dial on the outside for easy reading of temperature without opening the door.

Note: Optional HE-1600 heating unit in lieu of HE-2000, with *15 amps service and 1600W heating coil is available for insulated cabinets. Consult factory.

*For Canadian application, HE-2000 is furnished with 30 amps cord and plug and HE-1600 is furnished with 20 amps cord and plug. Consult factory.

Better food service equipment — standard models and custom designs.

C-5

Hot cabinets, non-insulated, aluminum & stainless steel

Aluminum Hot Non-Insulated Cabinets

Type	Model Number	Pan Size (Inches)	Pan Spacing (Inches)	Pan Capacity	O.A. Dimensions (Inches)			Weight (Pounds)
					W	D	H	
Extruded Side Panel	9250-H-1834	18 x 26	1½	34	22	30¾	69¾	140
	9250-H-1826	18 x 26	1½	26	22	30¾	57¾	130
	9250-H-1818	18 x 26	1½	18	22	30¾	45¾	120
Corrugated Sides	9270-H-1834	18 x 26	1½	34	22	30¾	69¾	132
Angle Ledge	9280-H-1817	18 x 26	3	17	22	30¾	69¾	137
	9280-H-1813	18 x 26	3	13	22	30¾	57¾	120
	9280-H-1809	18 x 26	3	9	22	30¾	45¾	110
	9280-H-1434	14 x 18	3	34	22	32¾	69¾	140

Stainless Steel Hot Non-Insulated Cabinets

Type of Slide	Model Number	Pan Size (Inches)	Pan Spacing (Inches)	Pan Capacity	O.A. Dimensions (Inches)			Weight (Pounds)
					W	D	H	
Corrugated	2270-H-1834	18x26	1½	34	22	30¾	69¾	265
Channel	2250-H-1834	18x26	1½	34	22	30¾	69¾	255
Angle Ledge	2280-H-1817	18x26	3	17	22	30¾	69¾	240
	2280-H-1434	14x18	3	34	22	32¾	69¾	252

NOTE: Angle ledge cabinets are also available in spacing other than 3". Consult factory.

Hot cabinets, insulated, aluminum & stainless steel

Aluminum Hot Insulated Cabinets (Removable Racks) (see notes 1, & 2)

Type	Model Number	Pan Size (Inches)	Pan Spacing (Inches)	Pan Capacity	O.A. Dimensions (Inches)			Weight (Pounds)
					W	D	H	
Extruded Side Channels	*9252-HIN-DD-1834	18 x 26	1½	34	27	36¾	72½	265
	9252-HIN-1826	18 x 26	1½	26	27	36¾	60½	237
Angle Ledge	*9282-HIN-DD-1817	18 x 26	3	17	27	36¾	72½	255
	9282-HIN-1813	18 x 26	3	13	27	36¾	60½	230
	*9282-HIN-DD-1434	14 x 18	3	34	27	36¾	72½	255
	9282-HIN-1426	14 x 18	3	26	27	36¾	60½	230

Stainless Steel Hot Insulated Cabinets (Removable Racks) (see notes 1, & 2)

Type	Model Number	Pan Size (Inches)	Pan Spacing (Inches)	Pan Capacity	O.A. Dimensions (Inches)			Weight (Pounds)
					W	D	H	
Channel Slide	*2252-HIN-DD-1834	18 x 26	1½	34	27	36¾	72½	378
	2252-HIN-1826	18 x 26	1½	26	27	36¾	60½	360
Angle Ledge	*2282-HIN-DD-1817	18 x 26	3	17	27	36¾	72½	380
	2282-HIN-1813	18 x 26	3	13	27	36¾	60½	360
	*2282-HIN-DD-1434	14 x 18	3	34	27	36¾	72½	386
	2282-HIN-1426	14 x 18	3	26	27	36¾	60½	364

*Dutch doors are standard on these 72½" tall hot insulated cabinets.

NOTE 1. These hot insulated cabinets are also available as "proof" only cabinets at no extra charge. Replace the letters "HIN" in the model number by letters "PIN". For hot/proof combination cabinets, see page C-9 & C-10. Angle ledge cabinets are also available with spacing other than 3". Consult factory.

NOTE 2. Hot insulated cabinets can also be furnished with 1600w heating unit (HE-1600) for 15 amps service instead of standard 2000w heating unit (HE-2000) at no extra charge. Consult factory.

Specifications:

• Extruded Sides Panel:

0.075" thick with 0.100" thick aluminum horizontal slides on 1½" centers and with interlocking inverted "V" seams.

• **Corrugations:** 0.063" thick aluminum or 20 ga. s/s sheets with corrugations spaced on 1½" centers.

• **Angle-Ledge:** Trays ride on bottom and not on bead. 0.075" thick aluminum or 18 ga. s/s angle slides are spaced on 3" centers. Models with other spacing can also be furnished. Consult factory.

• **Racks:** In insulated models, all racks are removable. In non-insulated models, all racks are fixed (removable optional). Uprites are 2"x1" channels (0.125" aluminum or 14 ga. s/s).

• **Channels slides:** 1½"x5/8"x0.075" thick aluminum or 18 ga. s/s channels spaced on 3" centers.

• **Other:** Deck is 0.019" or 0.125" reinforced aluminum or 14 ga. s/s. Insulated models use double wall 0.063" aluminum or 20 ga. outer/22 ga. inner s/s with 1½" fiberglass insulation. Non-insulated models use single wall 0.063"/0.080" aluminum or 20 ga./18 ga. s/s for backs, doors and double wall tops. Heavy duty hinges, latches & 5" poly casters are standard.

Options:

- Four corner bumpers.
- Wrap around bumper.
- Wheel brakes (pair).
- 6" Poly casters.
- 6" Balloon casters.
- Lockable latch.
- Door tag holder.
- 220/240V application.
 - Lexan® glass door
 - Dutch doors (std. on 72½" H insulated models).
 - Canadian application.
 - S/S inner door and magnetic gasket (aluminum model).
- Push handles.
- Removable rack for non insulated models (std. on insulated models).
- 10 hour limit timer