



SAMMONS EQUIPMENT

MANUFACTURING CORPORATION
Shammi Industries

Deluxe heater/proofer combination cabinets. Insulated & non-insulated

390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419

Fax (951) 340-2716


- **Choice of insulated or non-insulated models for 18"x26" bun pans.**
- **Flexibility of use as a "proof" cabinet or as a "hot" cabinet using same proofer/heater combination module with a "flip" of a switch.**

These^{*} hi-tensile aluminum cabinets provide an ability to control temperature between 80°F and 190°F by allowing proofing of dough products in the "proofing" mode or holding hot food at the desired temperature in the "heating" mode. The module and back tunnel are completely removable as are the racks in the insulated models. 5" heavy duty casters are standard. Insulated cabinets have fiberglass insulation at top, sides, back and solid door.

* Or stainless steel



Non-insulated Extruded Side Panel Cabinet
Model 9254-HP-1834 with standard Lexan®
Glass Door

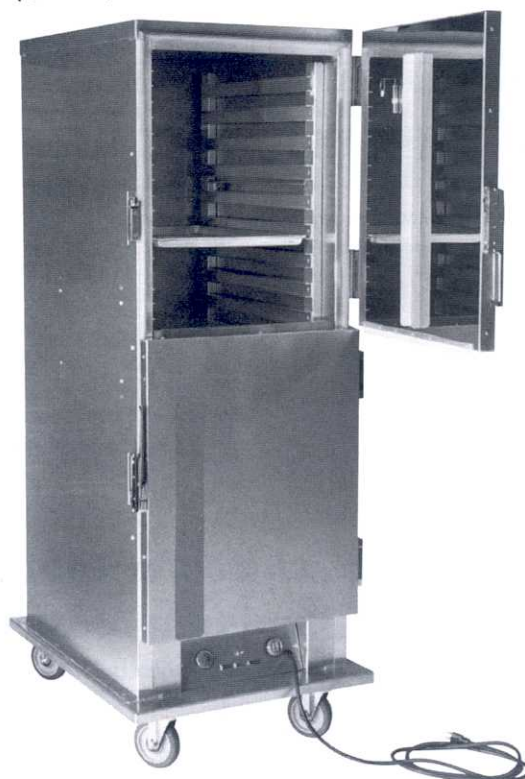

Insulated Cabinet with Dutch Door
Model 9253-HP-IN-DD-1834
(Removable Channel Slide Rack type)

HPR-2000 Heater/Proofer Module

- Flip of a switch changes "proofing" to "heating" mode & vice versa.
- 2000 Watt heating provided in the "heating mode".
- 1400 Watts of heating provided in the "proofing mode" by a 1000 watts coil air heater and 400 watts of "built-in" heating element under the stainless steel water pan.
- Precise humidity control provided by an infinity switch and a perforated water pan cover with adjustable openings.
- Air/moisture circulating by a 75 watt motor driven blower.
- Heating coil, "built-in" heater and blower are thermally protected.

- Cabinet temperature control provided by a highly efficient thermostat.
- Furnished with "Off-On" switch.
- Entire proofing unit removable for cleaning.
- Power, heating and proofing indicator pilot lights.
- Furnished with 20 amps rubber cord with 3 prong grounding plug, Nema 5-20p. (Note for use in Canada, 30 amps cord with Nema 5-30p plug is furnished. Consult factory.)
- **Power requirements:** Total 2075 watts on 110-120 volts 60 Hz, single phase, AC. Optional 220-240 volts unit available.

Thermometer: Through the door type with dial on the outside for easy reading of the temperature without opening the door.

Better food service equipment — standard models and custom designs.

Deluxe heater/proofer cabinets, non-insulated, aluminum & stainless steel

Aluminum Hot-Proofer Non-Insulated Cabinets

Type	Model Number	Pan Size (Inches)	Pan Spacing (Inches)	Pan Capacity	O.A. Dimensions (Inches)			Weight (Pounds)
					W	D	H	
Extruded Side Panel	9254-HP-1834	18 x 26	1½	34	22	30⅞	69⅞	140
	9254-HP-1826	18 x 26	1½	26	22	30⅞	57⅞	130
	9254-HP-1818	18 x 26	1½	18	22	30⅞	45⅞	120
Corrugated Sides	9274-HP-1834	18 x 26	1½	34	22	30⅞	69⅞	132
Angle Ledge	9284-HP-1817	18 x 26	3	17	22	30⅞	69⅞	137
	9284-HP-1434	14 x 18	3	34	22	32⅞	69⅞	140

Stainless Steel Hot /Proofer Non-Insulated Cabinets

Type of Slide	Model Number	Pan Size (Inches)	Pan Spacing (Inches)	Pan Capacity	O.A. Dimensions (Inches)			Weight (Pounds)
					W	D	H	
Corrugated	2274-HP-1834	18x26	1 ½	34	22	30⅞	69⅞	265
Channel	2254-HP-1834	18x26	1 ½	34	22	30⅞	69⅞	255
Angle Ledge	2284-HP-1817	18x26	3	17	22	30⅞	69⅞	240
	2284-HP-1434	14x18	3	34	22	32⅞	69⅞	252

NOTE: These non-insulated hot/proofer cabinets are provided with Lexan® doors as standard. Solid doors are available at no charge. Angle ledge cabinets are also available in different heights & spacing. Consult factory.

Deluxe heater/proofer cabinets, Insulated, aluminum & stainless steel

Aluminum Hot-Proof Insulated Cabinets (with removable racks)

Type	Model Number	Pan Size (Inches)	Pan Spacing (Inches)	Pan Capacity	O.A. Dimensions (Inches)			Weight (Pounds)
					W	D	H	
Extruded Side Channels	*9253-HP-IN-DD-1834	18 x 26	1½	34	27	36⅞	72½	265
	9253-HP-IN-1826	18 x 26	1½	26	27	36⅞	60	237
Angle Ledge	*9283-HP-IN-DD-1817	18 x 26	3	17	27	36⅞	72½	255
	9283-HP-IN-1813	18 x 26	3	13	27	36⅞	60	230
	*9283-HP-IN-DD-1434	14 x 18	3	34	27	36⅞	72½	255
	9283-HP-IN-1426	14 x 18	3	26	27	36⅞	60	230

Stainless Steel Hot/Proof Insulated Cabinets (with removable racks)

Type	Model Number	Pan Size (Inches)	Pan Spacing (Inches)	Pan Capacity	O.A. Dimensions (Inches)			Weight (Pounds)
					W	D	H	
Channel Slide	*2253-HP-IN-DD-1834	18 x 26	1½	34	27	36⅞	72½	378
	2253-HP-IN-1826	18 x 26	1½	26	27	36⅞	60½	360
Angle Ledge	*2283-HP-IN-DD-1817	18 x 26	3	17	27	36⅞	72½	380
	2283-HP-IN-1813	18 x 26	3	13	27	36⅞	60½	362

*Dutch doors are standard on these 72 ½" tall hot insulated cabinets

NOTE: Insulated cabinets are provided with solid insulated doors. Optional LEXAN® doors are available.

Specifications:

• Extruded Sides Panel:

0.075" thick with 0.100" thick aluminum horizontal slides on 1 ½" centers and with interlocking inverted "V" seams.

• Corrugations:

0.063" thick aluminum or 20 ga. s/s sheets with corrugations spaced on 1 ½" centers.

• Angle-Ledge:

Trays ride on bottom and not on bead. 0.075" thick aluminum or 18 ga. s/s angle slides are spaced on 3" centers. Models with other spacing can also be furnished. Consult factory.

• Racks:

In insulated models, all racks are removable. In non-insulated models, all racks are fixed (removable optional). Up-rites are 2"x1" channels (0.125" aluminum or 14 ga. s/s).

• Channel slides:

1 ½"x5/8"x0.075" thick aluminum or 18 ga. s/s channels spaced on 3" centers.

• Other:

Deck is 0.190" or 0.125" reinforced aluminum or 14 ga. s/s. Insulated models use double wall 0.063" aluminum or 20 ga. outer/22 ga. inner s/s with 1 ½" fiberglass insulation. Non-insulated models use single wall 0.063"/0.080" aluminum or 20 ga./18 ga. s/s for backs, doors and double wall tops. Heavy duty hinges, latches & 5" poly casters are standard

Options:

- Four corner bumpers.
- Wrap around bumper.
- Wheel brakes (pair).
- 6" Poly casters.
- 6" Balloon casters.
- Lockable latch.
- Door tag holder.
- 220/240V application.
- Lexan® glass door for insulated cabinet.
- Dutch doors (std. on 72 ½" H insulated models.)
- Canadian application.
- S/S inner door and magnetic gasket (aluminum model).
- Push handles.
- Removable rack for non insulated models (std. on insulated models).