

- **Well built cabinet for holding, storing or delivering food in various stages in 18"x26" sheet pans or 14"x18" trays.**
- **Lightweight, all aluminum construction.**
- **Available in standard duty and heavy duty models.**
- **N.S.F. listed.**



A must for every kitchen. Top & bottom are extra strong, heli-arc welded to the frame with additional reinforcing on the inside. Each cart comes with horizontal stabilizing bar at the front to prevent "racking". Other features include:

- **Top:** Made from inner & outer panels each 0.063" thick.
- **Bottom:** 0.190" thick formed into one piece.
- **Sides:** Made from 0.063" thick hi-tensile aluminum with corrugations spaced on 1 1/2" centers. Bun pans can be pulled out past the half way point without tipping over.
- **Uprites:** 2"x1"x0.125" specially extruded channels.
- **Back:** 0.063" aluminum welded to the top and deck to provide extra support.
- **Door:** 0.080" aluminum hemmed at all four sides with stainless steel hinges & gravity latch.
- **Casters:** 5"x1 1/4" deluxe, N.S.F. approved, all swivel.

**HEAVY DUTY MODELS**

- **Back:** 0.080" aluminum brake formed into "C" section at ends with extra vertical channel reinforcement in the middle. Additional horizontal stabilizing bar in the back is also provided.
- **Door:** Heavy duty reinforced door.




Heavy Duty  
Model 9105-HD-1839

Type	Model No.	Pan Capacity	Pan Size (Inches)	Overall Dimension (Inches)			Shipping Weight (pounds)
				A Width	B Depth	C Height	
Standard Duty	9105-1839	39	18x26	22	30 1/8	69 3/8	116
	9105-1831	31	18x26	22	30 1/8	57 3/8	106
	9105-1822	22	18x26	22	30 1/8	42 3/8	96
	9105-1478	*78	14x18	22	32 5/8	69 3/8	124
	9105-1462	*62	14x18	22	32 5/8	57 3/8	114
	9105-1444	*44	14x18	22	32 5/8	42 3/8	104
Heavy Duty	9105-HD-1839	39	18x26	22	30 1/8	69 3/8	121
	9105-HD-1831	31	18x26	22	30 1/8	57 3/8	111

\*Two trays side by side on each pair of corrugation.

**Super Duty Models:**

Double reinforced door, double tie rods and back reinforced with additional bracing (3/16" thick) fitted around rear uprites. For this style, add "-SD" after standard duty model numbers.

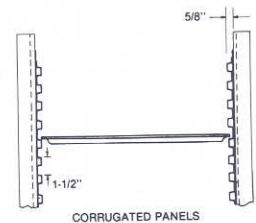

**Options:**

1. Four corner bumpers.
2. Wrap around bumper.
3. Swing door catch.
4. Lockable latch.
5. Wheel brakes.
6. Poly casters.
7. Door tag holder.
8. S/S construction.

*Better food service equipment — standard models and custom designs.*



# SAMMONS EQUIPMENT MANUFACTURING CORPORATION

Shammi Industries

## Aluminum cabinets for steam table pans with stainless steel corrugated sides or extruded aluminum side panels, Non-insulated

390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419

Fax (951) 340-2716

- Ideal for 12"x20" U.S.A. hotel steam pans and European / gastronorm GN 1/1 (325mmx530mm) pans.
- Aluminum cabinets available with stainless steel corrugated sides or with extruded aluminum interlocking side panels.



These cabinets are ideal for storage and transportation of bulk food in hotel steam pans. Corrugations or extruded slides are spaced on 1 1/2" centers and can be skipped to obtain different spacing for 4" or 6" deep pans. Each cabinet comes with horizontal stabilizing bars to prevent "racking". Other features include:

- **Top:** Made from inner and outer panels each 0.063" thick.
- **Bottom:** 0.190" thick formed into one piece.
- **Corrugated Sides:** Made from 0.030" thick (min.) stainless steel sheets with corrugations spaced on 1 1/2" centers. Pans can be pulled out past the half way point without tipping over.
- **Extruded Sides:** 0.075" thick specially extruded aluminum panels with 0.100" thick horizontal tray slides on 1 1/2" centers. Panels have interlocking inverted "V" seams which are further strengthened at the joints.
- **Uprights:** 2"x1"x0.125" specially extruded channels.
- **Back:** 0.063" aluminum formed and welded/rived to top, deck and sides.
- **Door:** 0.080" aluminum pan type, vertically reinforced with 1" square tubing, furnished with S/S latch.
- **Casters:** 5"x1 1/4" deluxe, N.S.F. listed, all swivel.
- **Hinges:** Heavy duty 12 GA. S/S.


**Pan Size:** U.S.A. 12"x20" steam pan or gastronorm GN 1/1 (325mmx530mm) steam pan. Cabinets will also accommodate GN 2/1 pan (530mmx650mm).




Aluminum Cabinet with Stainless Steel Corrugated Sides  
Model 9105-1238



Aluminum Cabinet with Aluminum Extruded Side Panels  
Model 9220-1230

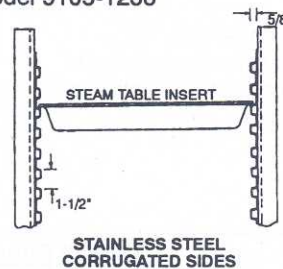

STAINLESS STEEL CORRUGATED SIDES

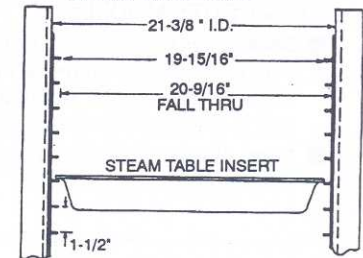

ALUMINUM EXTRUDED SIDE PANEL

Type	Model No.	*Pan Capacity	Pan Size (inches)	O.A. Dimensions (inches)			Shipping Weight (Pounds)
				Width	Depth	Height	
Stainless Steel Corrugated Sides	9105-1238	38	12x20	25	30 1/8	69 3/8	128
	9105-1230	30	12x20	25	30 1/8	57 3/8	120
	9105-1220	20	12x20	25	30 1/8	42	105
	9105-1216	16	12x20	25	30 1/8	36	92
Extruded Aluminum Interlocking Side Panels	9220-1238	38	12x20	25	30 1/8	69 3/8	120
	9220-1230	30	12x20	25	30 1/8	57 3/8	112
	9220-1222	22	12x20	25	30 1/8	45 3/8	94
	9220-1216	16	12x20	25	30 1/8	36	84

**Optional heavy duty reinforced back is available add "-HD" after the model number.**

**Options:**

1. Four corner bumpers.
2. Wrap around bumpers.
3. Swing door catch.
4. Lockable latch.
5. Wheel Brakes.
6. Poly casters.
7. Door tag.
8. Heavy duty reinforced back.

**9105 Series cabinets are also available in all stainless steel construction. Add "-SS" after model number.**



\*Pan capacity based on two 2 1/2" deep steam pans per set of corrugations or extruded slides. Capacity for 4" or 6" deep pan will vary.

*Better food service equipment — standard models and custom designs.*

- Heavy duty cabinet for holding or delivering food in various stages in 18"x26" sheet pans & 12"x20" steam pans.
- Stays sanitary with routine steam cleaning.
- Lightweight due to all aluminum construction, yet extremely rugged for long lasting service.
- Offered in both insulated and non-insulated models.

For today's needs in mind. Top & bottom are extra strong, heli-arc welded to the frame with additional reinforcing on the inside. Each cart comes with horizontal stabilizing bars to prevent "racking". Other features include:

- **Top:** Made from inner & outer panels each 0.063" thick.
- **Bottom:** 0.190" thick formed into one piece.
- **Sides:** 0.075" thick specially extruded aluminum panels with 0.100" thick horizontal tray slides on 1 1/2" centers. Panels have interlocking inverted "V" seams which are further strengthened at the joints.
- **Uprites:** 2"x1"x0.125" specially extruded channels.
- **Back:** 0.080" aluminum, brake formed into "C" section at ends to join rear uprite channels with extra reinforcement in the middle.
- **Door:** 0.080" aluminum pan type, vertically reinforced in the middle with 1" square tubing.
- **Casters:** 5"x1 1/4" deluxe, N.S.F. approved, all swivel.
- **Hinges and Latches:** Heavy duty 12 GA. S/S latch.
- **Insulation:** Insulated models use 1" polyurethane board between inner and outer panels at top, bottom, side and back. Outer shell is 0.063" thick.

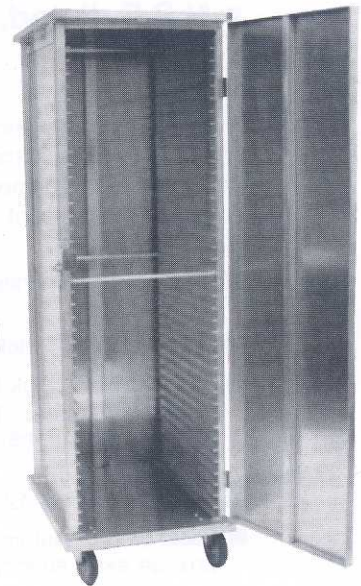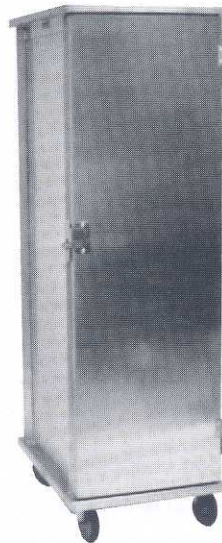


Model S-4285-39 (with optional lockable latch.)

**Non-insulated models:**

Model No.	Pan Capacity (18"x26")	Overall Dimension (Inches)			Shipping Weight (pounds)
		A Width	B Depth	C Height	
S-4285-39	39	22	30 1/8	69 3/8	124
S-4285-31	31	22	30 1/8	57 3/8	114
S-4285-23	23	22	30 1/8	45 3/8	104
*S-4285-36-12	*36	25	30 1/8	69 3/8	129
*S-4285-24-12	*24	25	30 1/8	57 3/8	119

\*For 12"x20"x2 1/2" steam pans (two per pair of slides)

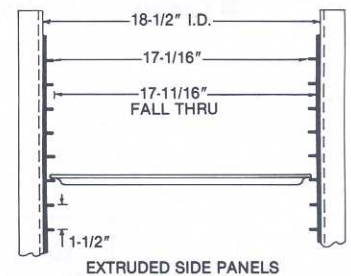

**Insulated models:**

Model No.	Pan Capacity (18"x26")	Overall Dimension (Inches)			Shipping Weight (pounds)
		A Width	B Depth	C Height	
S-4285-39-IN	39	24	32	69 3/8	188
S-4285-31-IN	31	24	32	57 3/8	175
S-4285-23-IN	23	24	32	45 3/8	162

**Correctional package available. Consult factory.**


**NOTE:** Non-insulated model S-4285-35 with 35 pan capacity (O.A. height 63 3/8") is also available. Consult factory.

**Options:**

1. Four corner bumpers.
2. Wrap around bumper.
3. Swing door catch.
4. Wheel brakes.
5. Polyurethane casters (5")
6. Door tag holders.
7. Lockable latch.
8. Balloon casters (6")

*Better food service equipment — standard models and custom designs.*

- **Sturdy cabinet for storing or delivering food in 18"x26" sheet pans**
- **Lightweight aluminum construction, yet built tough to withstand rough handling.**
- **N.S.F. listed.**

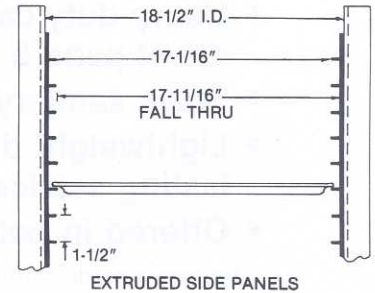

An economically priced cabinet for excellent service. Top & bottom are extra strong, heli-arc welded to the frame. Each cart comes with horizontal stabilizing bar at the front to prevent "racking". Other features include:

- **Top:** Made from inner & outer panels each 0.063" thick.
- **Bottom:** 0.190" thick formed into one piece.
- **Sides:** 0.075" thick specially extruded aluminum panels with 0.100" thick horizontal tray slides on 1 1/2" centers. Panels have interlocking inverted "V" seams.
- **Uprights:** 2"x1"x0.125 specially extruded channels.
- **Back:** 0.063" aluminum welded to the top & deck to provide extra support.
- **Door:** 0.080" aluminum hemmed at all four sides with stainless steel hinges & gravity latch.
- **Casters:** 5"x1 1/4" deluxe, N.S.F. approved, all swivel.



Model 9220-1839  
with optional wrap around bumper

Type	Model Number	*Pan Capacity	Pan Size (Inches)	O.A. Dimensions (Inches)			Weight (Inches)
				W	D	H	
Economy	9220-EC-1839	39	18 x 26	21	27 <sup>5</sup> / <sub>8</sub>	69 <sup>3</sup> / <sub>8</sub>	118
	9220-EC-1815	15	18 x 26	21	27 <sup>5</sup> / <sub>8</sub>	31 <sup>1</sup> / <sub>4</sub>	82
Std. Duty	9220-1839	39	18 x 26	22	30 <sup>1</sup> / <sub>8</sub>	69 <sup>3</sup> / <sub>8</sub>	123
	9220-1835	35	18 x 26	22	30 <sup>1</sup> / <sub>8</sub>	69 <sup>3</sup> / <sub>8</sub>	112
	9220-1831	31	18 x 26	22	30 <sup>1</sup> / <sub>8</sub>	57 <sup>3</sup> / <sub>8</sub>	116

\*Pan spacing is on 1 1/2" centers. For options see Table BB-1.



**Options:**

1. Four corner bumpers.
2. Wrap around bumpers.
3. Swing door catch.
4. Lockable latch.
5. Wheel brakes.
6. Poly casters.
7. Door tag holder.

*Better food service equipment — standard models and custom designs.*



# Institutional & correctional tray delivery & storage cabinet, extra heavy duty, non-insulated, aluminum

390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419

Fax (951) 340-2716

- Extra heavy duty cabinet made specially for correctional and other institutional use for holding, storing or delivering food in 18"x26" sheet pans.
- Additional reinforcement on two sides and a heavy duty bumper around the top makes it extremely rugged for long lasting service and provides excellent security.
- N.S.F. listed.

For correctional & heavy duty institutional use in mind. Top & bottom are extra strong, heli-arc welded to the frame with additional reinforcing on the inside. Each cart comes with two (1/2"x3/4") horizontal stabilizing bars to prevent "racking". In addition each side is reinforced vertically in the middle with a heavy duty extrusion attached to the sides & welded at top & bottom.

**Other features include:**

- **Top:** Made from inner & outer panels each 0.063". In addition a 3/16" thick aluminum bumper is wrapped around the top to provide extra reinforcement.
- **Bottom:** 0.190" thick formed into one piece with welded corners.
- **Sides:** 0.075" thick specially extruded aluminum panels with 0.100" thick horizontal tray slides on 1 1/2" centers or 0.075" thick x 1 1/4" wide slides on 3" centers. Panels have interlocking inverted "V" seams which are further strengthened at the joints.
- **Uprites:** 2"x1"x0.125" specially extruded channels.
- **Back:** 0.080" aluminum, brake formed into "C"-section at ends to join rear uprite channels with extra reinforcement in the middle.
- **Door:** 0.100" aluminum hemmed at all four sides with a door hold open device.
- **Casters:** 5"x1 1/4" deluxe, N.S.F. approved, all swivel, polyurethane tread.
- **Latch:** 54" long (or 30" long), 18GA. stainless lockable sliding latch.
- **Hinges:** one 54" long 18 GA. or 3 standard 12 GA., stainless steel to permit 270° door swing
- **Tag Holder:** Standard 0.063" aluminum. (2"x5")


**Options:**

1. Four corner bumpers
2. Wrap around bumper at base.
3. Swing door catch.
4. 6" balloon casters.
5. Wheel brakes.
6. Push handle.
7. Floor lock.


\*Cabinets also available with slides on 5 1/2" centers. Will reduce capacity. Please consult factory.



Model 9240-HD-1839



EXTRUDED ANGLE LEDGE PANEL

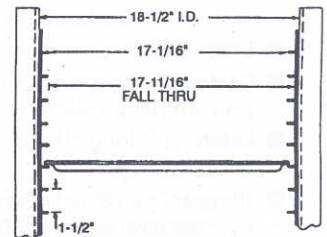


ALUMINUM EXTRUDED SIDE PANEL



Model	Pan Spacing (inches)	Pan Capacity (18"x26")	O.A. Dimensions (inches)			Shipping Weight (pounds)
			A Width	B Depth	C Height	
9240-HD-1839	1 1/2	39	22	30 1/8	69 3/8	130
9240-HD-1835	1 1/2	35	22	30 1/8	63 3/8	125
9240-HD-1831	1 1/2	31	22	30 1/8	57 3/8	120
9240-3-HD-1820	*3	20	22	30 1/8	69 3/8	120
9240-3-HD-1818	*3	18	22	30 1/8	63 3/8	127
9240-3-HD-1816	*3	16	22	30 1/8	57 3/8	122

Better food service equipment — standard models and custom designs.

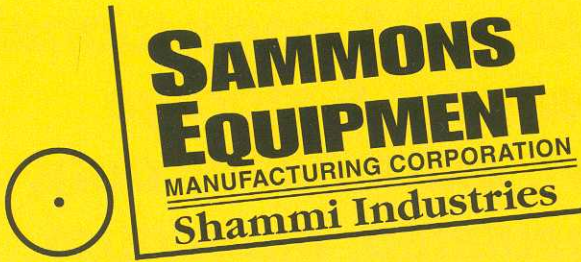

# Institutional tray delivery & storage cabinet, heavy duty, non-insulated, aluminum

390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419

Fax (951) 340-2716


- Heavy duty cabinet made specially for institutional use for holding, storing or delivering food in 18"x26" sheet pans.
- Lightweight due to all aluminum construction, yet extremely rugged for long lasting service and provides excellent security.
- N.S.F. listed.

For institutional use in mind. Top & bottom are extra strong, heli-arc welded to the frame with additional reinforcing on the inside. Each cart comes with two horizontal stabilizing bars to prevent "racking". Other features include:

- **Top:** Made from inner & outer panels each 0.063" thick.
- **Bottom:** 0.190" thick formed into one piece.
- **Sides:** 0.075" thick specially extruded aluminum panels with 0.100" thick horizontal tray slides on 1½" centers. Panels have interlocking inverted "V" seams which are further strengthened at the joints.
- **Uprites:** 2"x1"x0.125" specially extruded channels.
- **Back:** 0.080" aluminum, brake formed into "C"-section at ends to join rear uprite channels with extra reinforcement in the middle.
- **Door:** 0.100" aluminum hemmed at all four sides.
- **Casters:** 5"x1 ¼" deluxe, N.S.F. approved, all swivel, polyurethane tread.
- **Latch:** 30" long, 18 Ga. stainless lockable sliding latch.
- **Hinges:** One 48" or 54" long 18 GA. or three standard 12 GA. stainless steel to permit 270° door swing.
- **Tag Holder:** Standard 0.063" aluminum.



Model 9240-1839

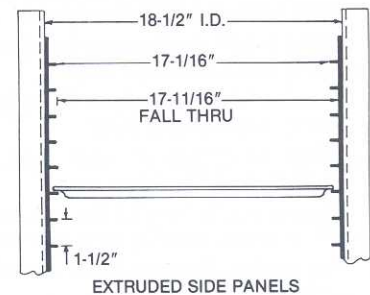

Model No.	Pan Capacity (18"x26")	Overall Dimension (Inches)			Shipping Weight (pounds)
		A Width	B Depth	C Height	
9240-1839	39	22	30 <sup>3</sup> / <sub>8</sub>	69 <sup>3</sup> / <sub>8</sub>	124
9240-1831	31	22	30 <sup>3</sup> / <sub>8</sub>	57 <sup>3</sup> / <sub>8</sub>	114
9240-1823	23	22	30 <sup>3</sup> / <sub>8</sub>	45 <sup>3</sup> / <sub>8</sub>	104

### Options:

1. Four corner bumpers.
2. Wrap around bumper.
3. Swing door catch.
4. 6" balloon casters.
5. Wheel brakes.

Better food service equipment — standard models and custom designs.



# SAMMONS EQUIPMENT MANUFACTURING CORPORATION

Shammi Industries

## Tray delivery carts/ cabinets non-insulated, single section, aluminum & stainless steel

390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419

Fax (951) 340-2716

- Deluxe carts for hotels & patient tray delivery for various tray sizes.
- Choice of aluminum or stainless steel with optional vinyl on all four sides.
- Single section models, easy to maneuver.

These carts offer exceptional mobility. Body is constructed of heavy gauge aluminum or stainless steel. 5" N.S.F. listed casters are standard. Door is furnished with 12 GA. stainless steel hinges & heavy duty S/S latch. Angle slides hold the trays in place. Optional vinyl on all sides makes it extremely attractive.



Aluminum Cart  
Model 9156-1424-40-3 with optional vinyl

Tray Size (Inches)	**Model Number		Tray Capacity Based on spacing				Overall Dimensions (Inches)		
	Aluminum	Stainless Steel	3"	4 1/2"	5 1/8"	6"	Width	Depth	Height
<b>14x18</b> Side Loaded 2 Trays/Pair of slides.	9156-1424	9156-SS-1424	40	26	24	20	22	32 3/8	69 3/8
	9156-1420	9156-SS-1420	36	24	20	18	22	32 3/8	63 3/8
	9156-1418	9156-SS-1418	32	20	18	16	22	32 3/8	57 3/8
	9156-1414	9156-SS-1414	24	16	14	12	22	32 3/8	45 3/8
<b>15x20</b> Side Loaded 2 Trays/Pair of slides.	9156-1524	9156-SS-1524	40	26	24	20	24 1/4	35 1/8	69 3/8
	9156-1520	9156-SS-1520	36	24	20	18	24 1/4	35 1/8	63 3/8
	9156-1518	9156-SS-1518	32	20	18	16	24 1/4	35 1/8	57 3/8
	9156-1514	9156-SS-1514	24	16	14	12	24 1/4	35 1/8	45 3/8
<b>*16x22</b>	9156-1610	9156-SS-1610	18	12	10	9	20 1/4	27 1/8	63 3/8
	9156-1609	9156-SS-1609	16	10	9	8	20 1/4	27 1/8	57 3/8
	9156-1607	9156-SS-1607	12	8	7	6	20 1/4	27 1/8	45 3/8

\*16x22 Trays are single end loaded, one tray/pair of slides.

\*\* While ordering, please specify model number followed by capacity and desired spacing. For example, to order aluminum cart for 14"x18" trays with 4 1/2" spacing and 24 capacity, specify model no. 9156-1420-24-4 1/2. Other spacings and carts for different tray sizes are available. Please consult factory. Cabinets for 14"x18" trays will also accommodate 18"x26" pans.

**Options:**

- |                                    |                                  |   |
|------------------------------------|----------------------------------|---|
| 1. Vinyl on all 4 sides (see note) | 6. Wrap around bumper.           | 11. Push handle                                   |
| 2. 5" Decorative casters.          | 7. Corner bumpers.               | 12. Trapezoid channel slides for trapezoid trays. |
| 3. 6" Poly casters.                | 8. Lockable latch.               | 13. Formica on all 4 sides (see note note).       |
| 4. 6" Balloon casters.             | 9. Pass thru (Door front & back) |   |
| 5. Brakes on casters.              | 10. No doors.                    |   |



**Note:** Optional vinyl or formica are furnished in woodgrain. Other colors are available. Consult factory.

*Better food service equipment — standard models and custom designs.*



- **Standard duty cabinet for holding, storing or delivering food in various stages in 18x26" sheet pans. Also available in heavy duty models.**
- **Stays sanitary with routine steam cleaning.**
- **N.S.F. listed.**

These cabinets allow bottom of the tray instead of the bead to ride on the angle ledge with standard 3" spacing. Top & bottom are extra strong, heli-arc welded to the frame with additional reinforcing on the inside. Each cart comes with horizontal stabilizing bar to prevent "racking". Other features include:

- **Top:** Made from inner & outer panels each 0.063" thick.
- **Bottom:** 0.190" thick formed into one piece.
- **Sides:** 0.063" thick with 1½"x1¾"x0.075" thick angle ledge slides spaced on 3" centers.
- **Uprites:** 2"x1"x0.125" specially extruded channels.
- **Back:** 0.063" aluminum.
- **Door:** 0.080" aluminum hemmed at all four sides with stainless steel hinges & gravity latch.
- **Casters:** 5"x1¼" deluxe, N.S.F. approved, all swivel.

**ADDITIONAL FEATURES FOR HEAVY DUTY MODELS:**

- **Back:** 0.080" aluminum, brake formed into "C" section at ends with extra reinforcement in the middle.
- **Door:** 0.080" brake formed reinforced vertically in the middle with 1" square tubing. Furnished with heavy duty latch.

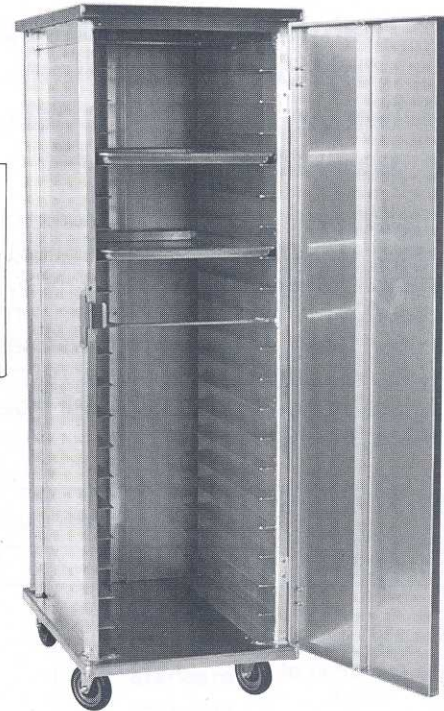

Model 9156-HD-1820



Type	Model No.	*Pan Capacity (18"x26")	Overall Dimension (Inches)			Shipping Weight (pounds)
			A Width	B Depth	C Height	
Standard Duty	9156-1820	20	22	30 3/8	69 3/8	124
	9156-1816	16	22	30 3/8	57 3/8	114
	9156-1812	12	22	30 3/8	45 3/8	104
Heavy Duty	9156-HD-1820	20	22	30 3/8	69 3/8	129
	9156-HD-1816	16	22	30 3/8	57 3/8	119
	9156-HD-1812	12	22	30 3/8	45 3/8	109

\*Cabinets also available for different capacity and with spacing other than 3". Consult factory.

**Super Duty Models:**

Double reinforced door, double tie rods and back reinforced with additional bracing (3/16" thick) fitted around rear uprites. For this style, add "-SD" after standard duty model numbers.

**Options:**

1. Four corner bumpers.
2. Wrap around bumper.
3. Swing door catch.
4. Lockable latch.
5. Wheel brakes.
6. Poly casters.
7. Door tag holder.
8. Stainless steel construction.





# SAMMONS EQUIPMENT MANUFACTURING CORPORATION

Shammi Industries

**Super duty and extra heavy duty tray delivery cabinets corrugated, extruded panels or angle slide type, non-insulated aluminum**

390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419

Fax (951) 340-2716


- Super duty & extra heavy duty cabinets for storing or delivery food in 18" x 26" sheet pans.
- Ideal for heavy school, institutional and correctional use.
- Hi-tensile all aluminum construction.
- Offered in corrugated sides, extruded sides and angle ledge models.



## Super Duty Models:


Top & Bottom are extra strong, heli-arc welded to the frame with additional reinforcing on the inside. Each cart over 50" tall comes with double horizontal stabilizing tie-rods to prevent "racking". Other features include:

- **Top:** Made from inner & outer panels each 0.063" thick.
- **Bottom:** 0.190" thick formed into one piece with welded corners.
- **Sides:** 0.075" thick specially extruded aluminum panels with 0.100" thick horizontal tray slides on 1 1/2" centers with interlocking inverted "V" seams. Corrugated cabinets have 0.063" thick sides providing 1 1/2" tray spacing. Angle ledge sides are 0.075" thick with 1 1/2" x 1 3/4" x 0.075" thick angle slides on 3" centers or 5 1/8" centers.
- **Door:** Heavywall aluminum pan type, vertically reinforced with 1" square tubing and furnished with 270° S/S hinges and gravity latch.
- **Back:** Heavy reinforced with additional horizontal braces (3/16" thick) wrapped around the back and rear uprights.
- **Casters:** 5" x 1 1/4" deluxe, N.S.F. listed, all swivel.

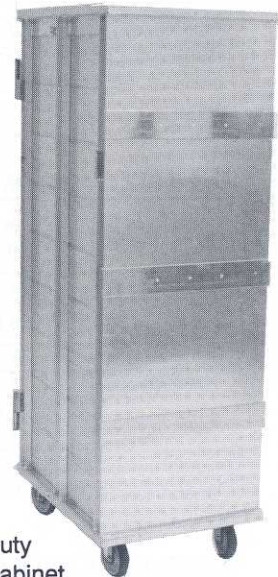


## Extra Heavy Duty Models


Same as Super Duty Models except furnished with additional vertical reinforcement in the middle of each side.



EXTRUDED SIDE PANELS



CORRUGATED PANELS



ANGLE LEDGE SUPPORT

Extra Heavy Duty  
Extruded Sides Cabinet  
Model 9220-EHD-1835

### Options:

1. Four corner bumper.
2. Wrap around bumper.
3. Swing door catch.
4. Lockable latch.
5. Wheel brakes.
6. Poly casters.
7. Door tag holder.
8. Extra reinforced door.
9. Correctional package.

Type	Model No.		Pan Spacing (inches)	Pan Capacity (18x26)	Overall Dimension			Shipping Weight (pounds)
	Super Duty	Extra Heavy Duty			A	B	C	
					Width	Depth	Height	
Extruded Sides Cabinets	9220-SD-1839	9220-EHD-1839	1 1/2	39	22	30 3/8	69 3/8	124
	9220-SD-1835	9220-EHD-1835	1 1/2	35	21	27 3/8	63 3/8	114
	9220-SD-1831	9220-EHD-1831	1 1/2	31	22	30 3/8	57 3/8	104
Corrugated Sides Cabinets	9105-SD-1839	—	1 1/2	39	22	30 3/8	69 3/8	119
	9105-SD-1831	—	1 1/2	31	22	30 3/8	57 3/8	109
	9105-SD-1822	—	1 1/2	22	22	30 3/8	42 3/8	100
Angle Ledge Cabinets	9156-SD-1820	9156-EHD-1820	3	20	22	30 3/8	69 3/8	120
	9156-SD-1816	9156-EHD-1816	3	16	22	30 3/8	57 3/8	106
	9156-SD-1812	9156-EHD-1812	5 1/8	12	22	30 3/8	69 3/8	94

**Correctional package:** Extra reinforced door, 3 hinges, 30" or 54" long S/S lockable latch, wrap around bumper & 6" balloon casters. Other optional are available. Consult factory.

*Better food service equipment — standard models and custom designs.*

- **Heavy duty insulated cabinets for holding, storing or delivering food in various stages in 18" x 26", 14" x 18" or 12" x 20" pans.**
- **Easy lift out rack for cleaning.**
- **Choice of channel slides or angle ledge rack.**

These completely insulated cabinets find ideal use in central kitchens, cafeterias, bakeries, schools, hospitals and other food establishments. Lightweight, hi-tensile aluminum construction and easy lift-out racks provide excellent durability.

**Specifications:**

- **Top, Back Sides & Door:** 0.063" thick double wall construction with 1½" thick fiberglass insulation and santoprene door gasket.
- **Hinges & Latches:** Heavy-duty stainless steel or high pressure die cast zinc.
- **Deck:** 0.125" thick.
- **Removable Rack:** Uprights are 2" x 1" x 1/8" channels. Channel slides and angle slides are 0.075 " thick.
- **Casters:** 5"x1 ¼" deluxe, N.S.F. listed, all swivel.

**HALF SIZE AND SMALLER CABINETS**

Model Number	Pan Size (Inches)	Pan Capacity	Pan Spacing (Inches)	O.A. Dimensions (Inches) W x D x H	WT. (LBS)
9264-IN-1808	18 x 26	8	2¾	27 x 32½ x 33	148
9264-IN-1808-LA	18 x 26	*8	2¾	27 x 32½ x 33	156
9264-IN-1813	18 x 26	13	1½	27 x 32½ x 33	150
9264-IN-1208	12 x 20	8	2¾	22 x 27½ x 33	124
9264-IN-UA-8	18 x 26	8	3	29½ x 32½ x 33	184
	12 x 20	16			

\*This model is furnished with large angle slides and can also carry 8 steam pans (12" x 20" x 2½") in lieu of 18" x 26".



9264-IN-1808

9115-IN-1839-RR

**¾ AND FULL SIZE CABINETS**

Type of Rack	Model Number	Pan Size (Inches) see note	Pan Capacity	Pan Spacing (Inches)	O.A. Dimensions (Inches)			Weight (Pounds)
					W	D	H	
Channel Slides	9115-IN-1839-RR	18 x 26	39	1½"	27	36½	70½	186
	9115-IN-1831-RR	18 x 26	31	1½"	27	36½	60½	180
Angle Ledge	9158-IN-1820-RR	18 x 26	20	3"	27	36½	72½	179
	9158-IN-1816-RR	18 x 26	16	3"	27	36½	60½	174
	9158-IN-1440-RR	**14 x 18	40	3"	27	36½	72½	179
	9158-IN-1432-RR	**14 x 18	32	3"	27	36½	60½	174

\*\* Two trays side by side on each pair of slides.

NOTE: Insulated cabinets for other pan sizes are also available. Angle ledge slide spacing other than 3" can also be furnished. **S/S construction is also available.** Consult factory.

**Options:**

- |                       |                       |                         |
|-----------------------|-----------------------|-------------------------|
| A. 5" poly casters    | E. Brakes on 2 wheels | I. Floor lock           |
| B. 6" balloon casters | F. Lockable latch     | J. Top Latch            |
| C. Wrap around bumper | G. Dutch doors        | K. S/S construction     |
| D. Corner Bumpers     | H. 3 sided top rail   | L. Correctional package |





390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419

Fax (951) 340-2716

- Ideal for schools, institutions, hotels & hospitals.
- Easily accommodates various sizes of pans & trays from 16" to 21" in width up to 26" long, all in one unit.
- Choice of insulated or non-insulated units.



These cabinets use universal angle which can hold 18"x26" bun pans, 14"x18" trays, 12"x20" steam pans, gastronorm (GN 2/1 and GN 1/1) pans, 10"x20" or 20"x22" roasting and baking pans and various other sizes. These angles are normally placed on 4 1/2" centers and are adjustable on 1 1/2" centers.




Insulated Model 9152-IN-13  
With Optional Wrap Around Bumper



Non-Insulated Model 9150-12

**Specifications:** Hi-tensile aluminum construction. Uprights are 2"x1"x1/4" extruded channels and slides are 0.105" thick step angle type adjustable on 1 1/2" centers (fixed optional). Doors are removable and use heavy duty stainless steel hinges and latches. 5" deluxe swivel casters are standard. Non insulated models use fixed racks and 270° door swing and single wall construction with 0.080" thick sides, back, door and top and 0.190" thick deck. Insulated models use 0.063" thick double wall construction with fiberglass insulation and removable rack. Deck is heavy duty reinforced.

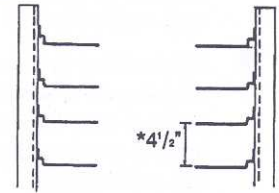

\*Adjustable on 1 1/2" centers

**UNIVERSAL STEP  
ANGLE SLIDE**

**Universal Angle Slide Cabinets:**

Type	Model Number	Tray Capacity (see note)	*Slide Spacing inches (mm)	No. of Slide Sets furn.	Overall Dimensions Inches (mm)			Weight Pounds (kg)
					Width	Depth	Height	
Non-Insulated	9150-11	11	4 1/2 (114)	11	26 (660)	31 (787)	59 1/2 (1511)	145 (66)
	9150-12	12	4 1/2 (114)	12	26 (660)	31 (787)	65 1/2 (1664)	155 (70)
	9150-13	13	4 1/2 (114)	13	26 (660)	31 (787)	70 (1778)	170 (77)
Insulated	9152-IN-6	6	4 1/2 (114)	5	29 (737)	35 1/2 (902)	42 (1067)	196 (89)
	9152-IN-10	10	4 1/2 (114)	9	29 (737)	35 1/2 (902)	60 (1524)	230 (104)
	9152-IN-13	13	4 1/2 (114)	12	29 (737)	35 1/2 (902)	72 (1829)	280 (127)

\*Adjustable on 1 1/2" (38mm) centers.

**Note:** Capacity shown is for 18"x26" bun pans. Each set of slides can carry one (1) each 18"x26" or 20"x22" bun pan or 530mmx650mm gastronorm (GN 2/1) pan or can carry two (2) each 14"x18" trays, 12"x20" U.S. (or 325mmx530mm) GN 1/1 gastronorm steam pans or 10"x20" pans.

**Correctional Package:**

These cabinets are also available with correctional package which includes 3 sets of non-removable hinges, fixed slides, lockable 24" long 12 GA. S/S vertical security padlock hasp, tamperproof screws, perimeter bumper and 6" balloon casters. Consult factory.

**Options:**

1. Wheel brakes
2. Corner bumpers
3. Full perimeter non-marking wrap around bumper.
4. 6" polyurethane casters.
5. Floor lock (cart stop) device.
6. 3 sided top rail for transport of light objects.
7. Lockable door latch.
8. Non-removable door.
9. Pull handles.
10. Removable rack for non-insulated models. (Std. on insulated models).
11. 6" balloon casters.
12. Correctional package (consult factory)
13. Dutch doors.
14. Stainless steel construction.

*Better food service equipment — standard models and custom designs.*



# SAMMONS EQUIPMENT

MANUFACTURING CORPORATION  
Shammi Industries

## Stainless steel, heavy duty insulated transport cabinet, universal angle type

390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419

Fax (951) 340-2716

- All stainless steel insulated cabinet (1½" thick insulation) for holding and transporting food for correctional and heavy institutional use.
- Universal angle slides can accommodate 18" x 26" bun pans, 12" x 20" x 2½" steam pans and 14" x 18" trays.
- Available in heavy duty and extra heavy duty models.



These insulated cabinets are great for fast loading and transporting of bulk food while maintaining the temperature for a certain period of time. Extremely well built, these cabinets are real work horses and are ideal for correctional facilities.

### Specifications:

- **Body:** Double wall 22 ga. polished stainless steel at sides, back, top, door and 22 ga S/S inner base with 1½" thick hi density fiberglass insulation.
- **Deck:** Outer base is 14 ga. stainless steel reinforced with 14 ga. S/S/ channel bolsters.
- **Slides:** 16 ga. S/S universal angle step type welded at 3½" centers.
- **Other:** Door is mounted with 12 ga. S/S hinges and is secured with heavy duty positive door latch to provide a seal around a magnetic gasket. Door interior has mirror finish.
- **Handles:** Four 1" dia. x 20" long push-pull handles with 12 ga. S/S brackets are mounted on sides with tamper proof bolts.
- **Casters:** 5" polyurethane, all swivel, N.S.F. listed.
- **Bumper:** Full perimeter type wrap around bumper, extending beyond all walls.



Extra Heavy Duty Model  
2150-HD-UA-12 shown with optional correctional package

### Options:

1. 24" long security padlock hasp.
2. Top mounted latch
3. Brakes on casters.
4. 6" Balloon casters.
5. 6" poly casters.
6. 8" poly casters.
7. Correctional security package.
8. Spacing other than 3½" (consult factory)

### EXTRA HEAVY DUTY MODELS:

- **Outer walls:** 18 ga. polished S/S, at sides, back, top and door.

**Optional correctional Security package.** Includes 24" long, 12 ga. S/S vertical security padlock hasp, tamperproof screws and 6" balloon casters.

Type	Model No.	Spacing (inches)	*Capacity (18" x 26" pans)	Overall Dimensions (inches)			Shipping weight (pounds)
				Width	Depth	Height	
Heavy Duty Model	2150-UA-12	3½	12	30¼	38¼	52¼	281
Extra Heavy Duty Model	2150-HD-UA-12	3½	12	30¼	38¼	52¼	312

\*Cabinet will also accommodate 24 trays (14" x 18") or 24 steam pans (12" x 20" x 2½").


*Better food service equipment — standard models and custom designs.*




- Excellent cabinets for storing and displaying food in 18"x26" sheet pans.
- Plexiglass door allows clear view of merchandise.
- Offered in corrugated sides, extruded sides and angle ledge models.
- N.S.F. listed.

Top & bottom are extra strong, heli-arc welded to the frame with additional reinforcing on the inside. Other features include.


- **Top:** Made from inner & outer panels each 0.063" thick.
- **Bottom:** 0.190" thick formed into one piece.
- **Sides:** 0.075" thick specially extruded aluminum panels with 0.100" thick horizontal tray slides on 1 1/2" centers with interlocking inverted "V" seams. Corrugated cabinets have 0.063" thick sides providing 1 1/2" tray spacing. Angle ledge sides are 0.075" thick with 1 3/4"x0.075" thick angle slides on 3" centers or 5 1/16" centers.
- **Uprites:** 2"x1"x0.125" specially extruded channels.
- **Door:** Plexiglass in an extruded aluminum frame, with stainless steel hinges and latches.
- **Casters:** 5"x1 1/4" deluxe, N.S.F. listed, all swivel.




ALUMINUM EXTRUDED  
SIDE PANEL



CORRUGATED PANELS

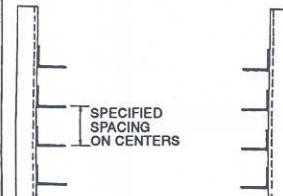

ANGLE LEDGE  
SUPPORT

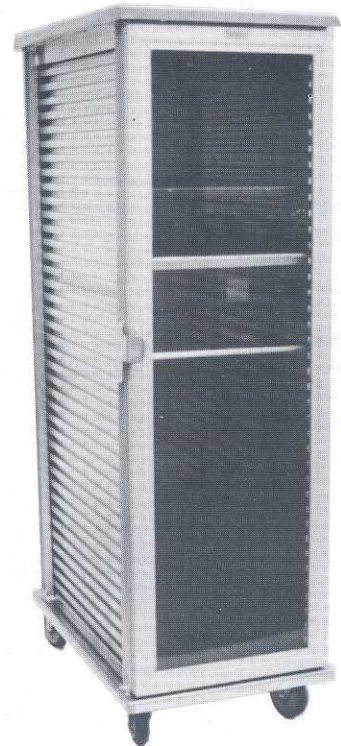

Corrugated Cabinet  
Model 9105-PD-39


Type	Model No.	Pan Capacity (18"x26")	Pan Spacing (inches)	O.A. Dimensions (inches)			Shipping Weight (pounds)
				A	B	C	
				Width	Depth	Height	
Extruded Sides Cabinets	9220-PD-39	39	1 1/2	22	30 1/8	69 3/8	124
	9220-PD-31	31	1 1/2	22	30 1/8	57 3/8	114
Corrugated Sides Cabinets	9105-PD-39	39	1 1/2	22	30 1/8	69 3/8	119
	9105-PD-31	31	1 1/2	22	30 1/8	57 3/8	109
Angle Ledge Cabinets	9156-PD-20	20	3	22	30 1/8	69 3/8	120
	9156-PD-16	16	3	22	30 1/8	57 3/8	106
	9156-PD-12	12	5 1/16	22	30 1/8	69 3/8	102
	9156-PD-9	9	5 1/16	22	30 1/8	57 3/8	94

**Options:**

1. Four corner bumpers.
2. Wrap around bumper.
3. Swing door catch
4. Lockable latch.
5. Wheel brakes.
6. Poly casters.
7. Door tag holder.

**Note:** Other slide spacings are available. Cabinets are also available for different tray sizes. Please consult factory

*Better food service equipment — standard models and custom designs.*

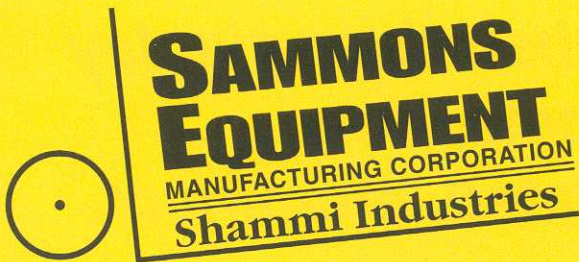

# Pass thru' cabinets, non-insulated, aluminum

390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419

Fax (951) 340-2716


- Pass thru' cabinets for storing or delivering food in 18" x 26" sheet pans.
- Doors in front & back provide quick service.
- Lightweight all aluminum construction.
- Offered in corrugated sides, extruded sides and angle ledge models.
- N.S.F. listed.

Top & bottom are extra strong, heli-arc welded to the frame with additional reinforcing on the inside.\* Each cart comes with horizontal stabilizing bars to prevent "racking". Other features include:

- **Top:** Made from inner & outer panels each 0.063" thick.
- **Bottom:** 0.190" thick formed into one piece.
- **Sides:** 0.075" thick specially extruded aluminum panels with 0.100" thick horizontal tray slides on 1 1/2" centers with interlocking inverted "V" seams. Corrugated cabinets have 0.063" thick sides providing 1 1/2" tray spacing. Angle ledge sides are 0.063" thick with 1 1/2" x 1 3/4" x 0.075" thick angle slides on 3" centers.
- **Uprites:** 2" x 1" x 0.125" specially extruded channels.
- **Door:** 0.080" aluminum hemmed at all four sides with 270° stainless steel hinges & gravity latch.
- **Casters:** 5" x 1 1/4" deluxe, N.S.F. approved, all swivel.



Model 9220-39-PT  
Extruded Sides Pass Thru' Cabinet

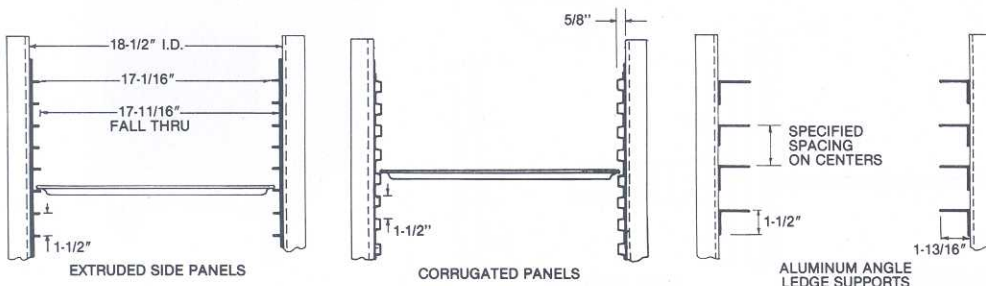

Type	Model No.	Pan Capacity (18" x 26")	Overall Dimension (Inches)			Shipping Weight (pounds)
			A Width	B Depth	C Height	
Extruded Sides Cabinets	9220-39-PT	39	22	30 3/8	69 3/8	124
	9220-31-PT	31	22	30 3/8	57 3/8	114
	9220-23-PT	23	22	30 3/8	45 3/8	104
Corrugated Sides Cabinets	9105-39-PT	39	22	30 3/8	69 3/8	119
	9105-31-PT	31	22	30 3/8	57 3/8	109
	9105-22-PT	22	22	30 3/8	45 3/8	100
Angle Ledge Cabinets	9156-20-PT	20	22	30 3/8	69 3/8	120
	9156-16-PT	16	22	30 3/8	57 3/8	106
	9156-12-PT	12	22	30 3/8	45 3/8	94

**Options:**

1. Four corner bumpers.
2. Wrap around bumper.
3. Swing door catch.
4. Lockable latch.
5. Wheel brakes.
6. Poly casters.
7. Door tag holder.

\*Over 50" tall.

Better food service equipment — standard models and custom designs.

B-14




- Heavy duty aluminum cabinets for transporting and holding food hot or cold in 18" x 26" sheet pans using canned fuel or optional cold retainers.
- Removable insert with 2 large holes holds two standard 7 ounce fuel cans.
- Offered in corrugated sides, extruded sides and angle ledge models.

These cabinets are designed to transport hot or cold foods. Vertical channel in the back and tubing in the door facilitate proper air flow. Top & bottom are extra strong, heli-arc welded to the frame with additional reinforcing on the inside.

\*Each cart comes with horizontal stabilizing bars to prevent "racking". Other features include:

- **Top:** Made from inner & outer panels each 0.063" thick.
- **Bottom:** 0.190" thick formed into one piece.
- **Sides:** 0.075" thick specially extruded aluminum panels with 0.100" thick horizontal try slides on 1 1/2" centers with interlocking inverted "V" seams. Corrugated cabinets have 0.063" thick sides providing 1 1/2" tray spacing. Angel ledge sides are 0.075" thick with 1 3/4" wide x 0.075" thick angle slides spaced on 3" centers.
- **Uprites:** 2" x 1" x 0.125" specially extruded channels.
- **Door:** 0.080" aluminum pan type vertically reinforced with 1" square tubing and furnished with 270° stainless steel hinges & gravity latch.
- **Back:** 0.080" aluminum brake formed into "C" section at ends to join rear uprite channels with extra reinforcement (pan stop) in the middle.
- **Casters:** 5" x 1 1/4" deluxe, N.S.F. listed, all swivel.

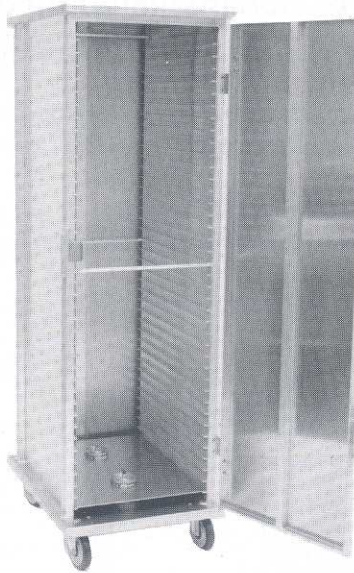

Extruded Side Panel Cabinet  
Model 9220-37-ER



Corrugated Side Cabinet  
Model 9105-37-CR

(Note: Fuel cans are not furnished)



Type	Model No.	Pan Spacing (inches)	Pan Capacity (18 x 26)	Overall Dimensions (inches)			Shipping Weight (pounds)
				A Width	B Depth	C Height	
Extruded Sides Cabinets	9220-37-ER	1 1/2	37	22	30 1/8	69 3/8	124
	9220-29-ER	1 1/2	29	22	30 1/8	57 3/8	114
	9220-21-ER	1 1/2	21	22	30 1/8	45 3/8	104
Corrugated Sides Cabinets	9105-37-CR	1 1/2	37	22	30 1/8	69 3/8	119
	9105-29-CR	1 1/2	29	22	30 1/8	57 3/8	109
	9105-20-CR	1 1/2	20	22	30 1/8	42 3/8	100
**Angle Ledge Cabinets	9156-18-LS	3	18	22	30 1/8	69 3/8	120
	9156-14-LS	3	14	22	30 1/8	57 3/8	106
	9156-10-LS	3	10	22	30 1/8	45 3/8	94


**Options:**

1. Four corner bumpers.
2. Wrap around bumper.
3. Swing door catch.
4. Lockable latch.
5. Wheel brakes.
6. Poly casters.
7. Door tag holder.
8. Adjustable door vents.
9. Push handle.
10. Extra insert.
11. 13" x 18" cold retainers

\*Over 50" Tall

\*\*Angle ledge cabinets are also available in 5 1/8" spacing. Consult factory.

*Better food service equipment — standard models and custom designs.*

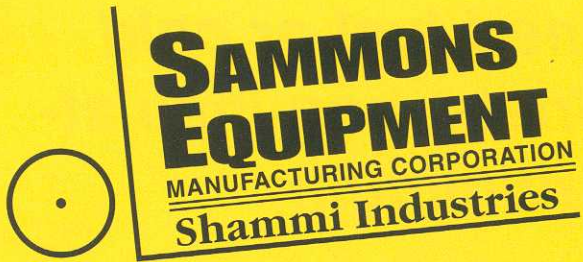

# Hand lift cabinets, insulated & non-insulated




390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419

Fax (951) 340-2716

- **Portable and stackable cabinets for transporting and storing baked goods and similar products.**
- **Available for 18" x 26" bun pans or 12" x 20" x 2 1/2" steam pans with further choice of insulated or non-insulated models.**

- **Pan supports and sides:** 0.075" solid extruded aluminum panels with 0.100" thick slides on 1 1/2" centers with inverted "V" seams.
- **Back and Top:** 0.063" thick alum. Insulated models have double wall.
- **Door:** 0.080" thick aluminum. Insulated models use 0.063" double wall.
- **Base:** 0.125" aluminum.
- **Hinges and latches:** Stainless steel with 270° swing.
- **Insulated models:** 1" polyurethane board insulation between inner and outer walls.
- **Recessed drop handles:** Two on each side for easy lifting.

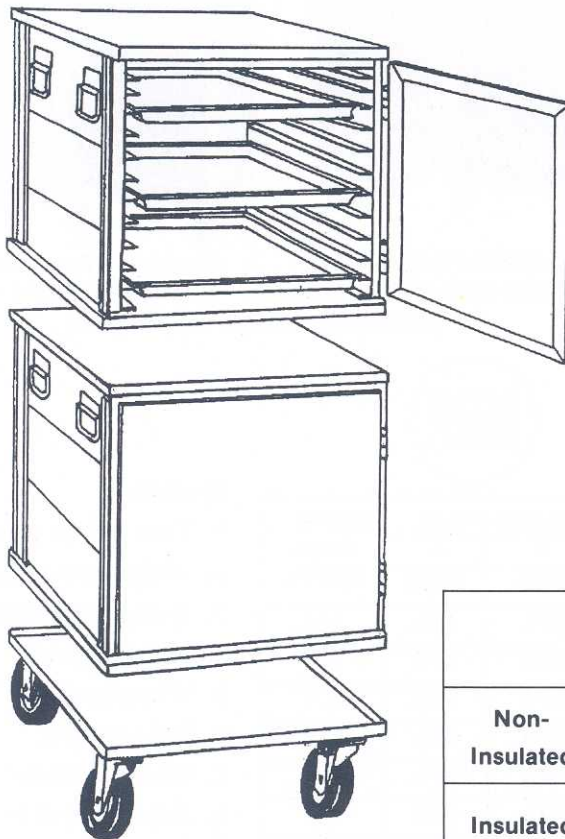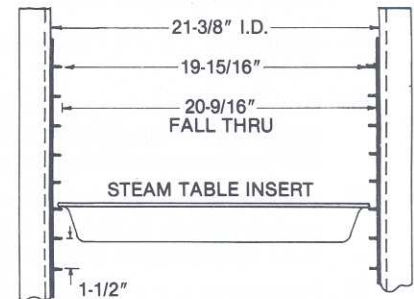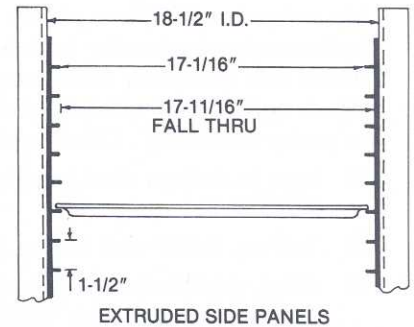

Model 9264-1826  
(one stacked on top of other)  
with optional dolly

	Model No.	Pan Size	Pan Capacity	Overall Dimensions (Inches)			Weight (lbs.)
				A Width	B Depth	C Height	
Non-Insulated	9264-1826	BUN PAN 18" x 26"	11	21	27	21	32
	9264-1220	STEAM PAN 12" x 20" x 2 1/2"	10	23 3/8	27	21	34
Insulated	9264-1826-IN	BUN PAN 18" x 26"	11	22 1/2	29	21 1/2	51
	9264-1220-IN	STEAM PAN 12" x 20" x 2 1/2"	10	25 3/8	29	21 1/2	55

**Optional:** 1. Dolly for carrying cabinets.

*Better food service equipment — standard models and custom designs.*



- Heavy duty construction for 18" x 26" bun pans and 14" x 18" trays.
- Choice of 3 different spacings.
- Correctional package available.

These heavy duty hi-tensile aluminum cabinets provide twice the storage capacity of a single cabinet. Trays ride on outer bead on 1 1/2" spacing or ride on bottom on angle slides (for 3" or 5 1/16" spacing). Other spacings and cabinets for different tray sizes are available (please consult factory).

**Specifications:**

- **Sides:** Extruded, panel 0.075" thick with integral horizontal projections (0.100" thick for 1 1/2" spacing, 0.075" thick x 1 3/4" wide angles for 3" and 5 1/16" spacing).
- **Casters:** 5" x 1 1/4" deluxe, all swivel
- **Top:** 0.063" double wall

- **Base:** 0.190" thick formed into one piece with welded corners.
- **Uprights:** 2" x 1" x 1/8" channels
- **Back:** 0.063" thick
- **Door:** 0.080" thick formed with vertical tubing reinforcement.
- **Hinges:** 12 GA. S/S.
- **Latches:** 14 GA. S/S.



Model 9156-2-1824 with optional wrap around bumper, 3 sided top rail, polyurethane casters and push handles.

**Double Section Cabinets: (Single end loaded, except as noted)**

Model No.	Pan Size (inches)	Pan Spacing (inches)	Pan Capacity	Overall Dimensions Inches			Weight (Pounds)
				Width	Depth	Height	
9220-2-1878	18 x 26	1 1/2	78	45 3/8	30 1/8	69 3/8	306
9220-2-1862	18 x 26	1 1/2	62	45 3/8	30 1/8	57 3/8	285
9156-2-1840	18 x 26	3	40	45 3/8	30 1/8	69 3/8	298
9156-2-1832	18 x 26	3	32	45 3/8	30 1/8	57 3/8	275
9156-2-1824	18 x 26	5 1/16	24	45 3/8	30 1/8	69 3/8	290
9156-2-1818	18 x 26	5 1/16	18	45 3/8	30 1/8	54 3/8	270
9156-2-1480	*14 x 18	3	80	45 3/8	32 3/8	69 3/8	315
9156-2-1448	*14 x 18	5 1/16	48	45 3/8	32 3/8	69 3/8	298

\*Two trays loaded side by side on same pair of slides.

**Correctional Package:**

Welded slides, 3 heavy duty hinges on each door, additional vertical reinforcement on each side, 30" long (18 GA S/S) lockable latches, wrap around bumper, push handles & 6" balloon Casters. Other options are available.


**Options:**

- A. Four Corner Bumpers.
- B. Wrap Around Bumper.
- C. Swing Door Catch.
- D. Lockable Latch.
- E. Wheel Brakes.
- F. 5" Poly Casters.
- G. 6" Poly Casters.
- H. 6" Balloon Casters.
- I. Door Tag Holder.
- J. 3 Sided Top Rail.
- K. Floor Lock.
- L. Push Handle(s).
- M. Top Mounted Latch.
- N. Correctional Package.
- O. S/S Construction.

*Better food service equipment — standard models and custom designs.*

- **Ideal for transporting and storing food in oval trays (20<sup>3</sup>/<sub>4</sub>"x25<sup>1</sup>/<sub>2</sub>" and 22<sup>3</sup>/<sub>4</sub>"x 27<sup>5</sup>/<sub>8</sub>").**
- **Available in single section or double section cabinets with choice of aluminum or stainless construction.**


These cabinets provide excellent service for transporting & storing food in oval trays. The ultra wide supports prevent trays from falling thru!

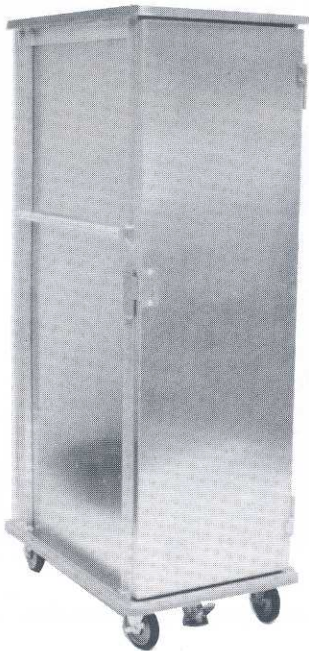

Single Section Cabinet  
9156-OT-10 with optional Handle,  
Brakes, Floor Lock & Wrap  
around Bumper

**Specifications:**

- **Slides:** 4" wide angle ledges, 0.105" thick alum. or 16 GA. S/S.
- **Body:** 0.063"/0.080" thick alum. or 20 GA. S/S.
- **Door:** 0.080" thick alum. or 18 GA. S/S brake formed & reinforced with 1" square tubing.
- **Deck:** 0.190" alum. or heavy GA. S/S.
- **Top:** Double panel.
- **Hinges & Latches:** 12 GA. S/S hinges & heavy duty S/S latches.
- **Casters:** 5" deluxe, N.S.F. listed, all swivel.



**OVAL TRAY**



Double Section Cabinet  
9156-D-OT-20

Model Number		Tray Capacity	Spacing (C-C) inches	Overall Dimensions (inches)		
Aluminum	Stainless Steel			Width	Depth	Height
<b>SINGLE SECTION CABINET</b>						
9156-OT-10	9156-OT-10-SS	10	6	27 <sup>3</sup> / <sub>8</sub>	32 <sup>5</sup> / <sub>8</sub>	69 <sup>3</sup> / <sub>8</sub>
9156-OT-8	9156-OT-8-SS	8	6	27 <sup>3</sup> / <sub>8</sub>	32 <sup>5</sup> / <sub>8</sub>	57 <sup>3</sup> / <sub>8</sub>
<b>DOUBLE SECTION CABINET</b>						
9156-D-OT-20	9156-D-OT-20-SS	20	6	55 <sup>3</sup> / <sub>8</sub>	32 <sup>5</sup> / <sub>8</sub>	69 <sup>3</sup> / <sub>8</sub>
9156-D-OT-16	9156-D-OT-16-SS	16	6	55 <sup>3</sup> / <sub>8</sub>	32 <sup>5</sup> / <sub>8</sub>	57 <sup>3</sup> / <sub>8</sub>


**Options:**

1. Four corner bumpers.
2. Wrap around bumper.
3. Swing door catch
4. Lockable latch.
5. Floor lock.
6. Wheel brakes.
7. Push handle.
8. 5" Poly casters.
9. 6" Poly casters.
10. Door tag holder.
11. Vinyl on 4 sides.
12. Formica on 4 sides.



**Note:** Different spacing is available. Please consult factory.

*Better food service equipment — standard models and custom designs.*

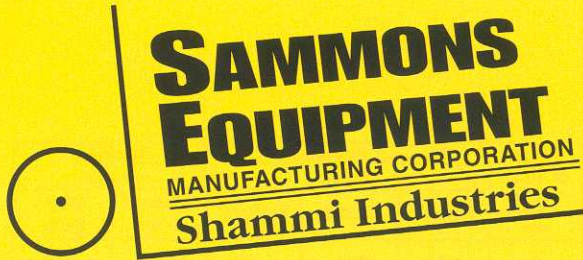

# Enclosed tray delivery carts, with or without doors, aluminum & stainless steel

390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419

Fax (951) 340-2716

- **Deluxe carts for efficient transportation of meals.**
- **Hi-tensile aluminum or stainless steel models.**


These carts are designed for hospitals and institutions for quick delivery of meal trays and are available in various capacities. Ideal for facilities using a pellet system for keeping food warm.

### FEATURES INCLUDE:


- **Racks:** Aluminum angle slides and uprights (S/S rack optional)
- **Body:** 0.080" alum. or 18 GA. S/S.
- **Casters:** 6" poly (2 swivel, 2 rigid)
- **Push Handle:** One standard, (second optional)
- **Bumper:** Full perimeter



Model 9200-1624  
(with optional second handle & optional 8" casters)

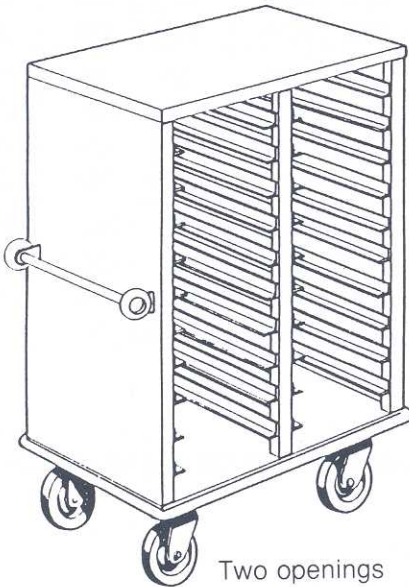

Two openings  
cart  
without door

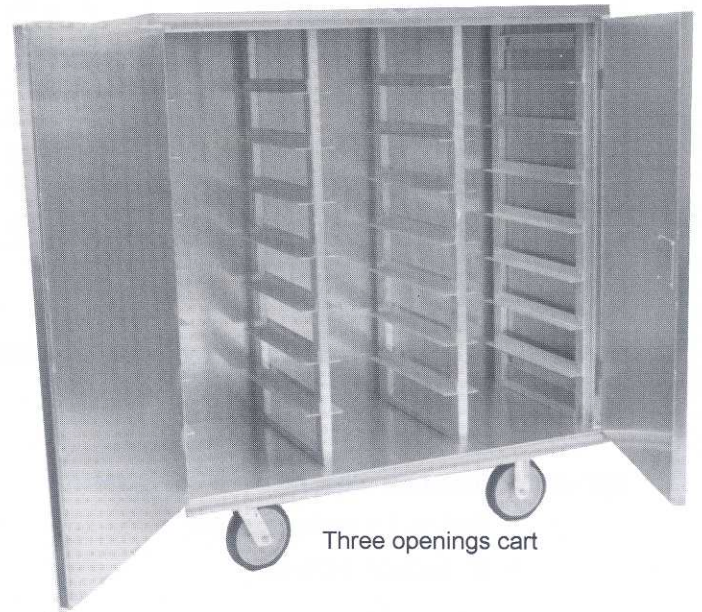

Three openings cart

**NOTE: For BOTH aluminum and stainless steel models, the racks inside the cabinet are constructed of hi-tensile aluminum. Optional stainless steel racks for stainless models are available.**

*Better food service equipment — standard models and custom designs.*

## Aluminum Models:

Tray Size (Inches)	Model No.		No. of Openings	Pan Capacity	Spacing on Centers (Inches)	Type of Rack F = Fixed R = Removable	Overall Dimensions (Inches)			Weight (Pounds)	
	With Door	Without Door					Depth	Width	Height	Without Door	With Door
14x18	9200-1416	9202-1416	2	16	5-1/16	F	29¼	48½	56	164	202
	9200-1414	9202-1414	2	14	6	F	29¼	48½	56	161	198
	9200-1427	9202-1427	3	27	5-1/16	F	29¼	60½	58½	180	218
	9200-1424	9202-1424	3	24	6	F	29¼	60½	58½	176	214
15x20	9200-1516	9202-1516	2	16	5-1/16	F	29¼	48½	56	164	202
	9200-1514	9202-1514	2	14	6	F	29¼	48½	56	161	198
	9200-1527	9202-1527	3	27	5-1/16	F	29¼	60½	58½	180	218
	9200-1524	9202-1524	3	24	6	F	29¼	60½	58½	176	214
16x22	9200-1616	9202-1616	2	16	5-1/16	R	29¼	48½	56	164	202
	9200-1614	9202-1614	2	14	6	R	29¼	48½	56	161	198
	9200-1627	9202-1627	3	27	5-1/16	R	29¼	60½	58½	180	218
	9200-1624	9202-1624	3	24	6	R	29¼	60½	58½	176	214

## Stainless Steel Models (\*with removable aluminum racks)

Tray Size (Inches)	Model No.		No of Openings	Pan Capacity	Spacing on Centers (Inches)	Type of Rack F = Fixed R = Removable	Overall Dimensions (Inches)			Weight (Pounds)	
	With Door	Without Door					Depth	Width	Height	Without Door	With Door
14x18	2200-1416	2202-1416	2	16	5-1/16	R	29¼	48½	56	236	292
	2200-1414	2202-1414	2	14	6	R	29¼	48½	56	228	284
	2200-1427	2202-1427	3	27	5-1/16	R	29¼	60½	58½	266	322
	2200-1424	2202-1424	3	24	6	R	29¼	60½	58½	258	314
15x20	2200-1516	2202-1516	2	16	5-1/16	R	29¼	48½	56	236	292
	2200-1514	2202-1514	2	14	6	R	29¼	48½	56	228	284
	2200-1527	2202-1527	3	27	5-1/16	R	29¼	60½	58½	266	322
	2200-1524	2202-1524	3	24	6	R	29¼	60½	58½	258	314
16x22	2200-1616	2202-1616	2	16	5-1/16	R	29¼	48½	56	236	292
	2200-1614	2202-1614	2	14	6	R	29¼	48½	56	228	284
	2200-1627	2202-1627	3	27	5-1/16	R	29¼	60½	58½	266	322
	2200-1624	2202-1624	3	24	6	R	29¼	60½	58½	258	314


**NOTE:** Other custom sizes are available for different size trays and glass racks. Please consult factory for your particular needs.

### Options: 1. Stainless steel rack (for s/s models)

2. Brakes on swivel casters.
3. 6" balloon casters.
4. Second push handle.
5. 8" polyurethane casters.
6. Swing door catch.
7. Top mounted latches.

- **Deluxe carts for patient tray delivery.**
- **Choice of aluminum or stainless steel and optional vinyl on all four sides.**

These heavy duty carts provide an effective and efficient delivery of meal trays. Body is constructed of heavy gauge aluminum or stainless steel. Carts are furnished with wrap around bumper and a push handle. 5" heavy duty casters and heavy gauge S/S latches are standard. Doors are mounted with 12 GA. S/S hinges.

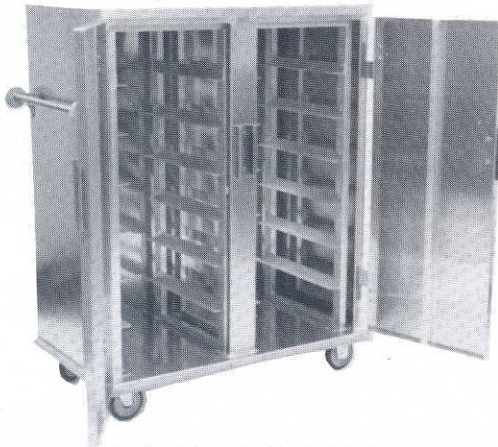

Model 9156-D-1516-14-6



Model 9156-D-1516-14-6 with optional vinyl on all 4 sides

Tray Size (inches)	*Model Number		Tray Capacity Based on spacing				Overall Dimensions (inches)		
	Aluminum	Stainless Steel	3"	4 1/2"	5 1/8"	6"	Width	Depth	Height
<b>Single End Loaded, 1 Tray/Pair of Slides</b>									
<b>14x18</b>	9156-D-1416	9156-D-SS-1416	30	20	16	14	47 1/4	26 1/4	54
	9156-D-1412	9156-D-SS-1412	22	14	12	10	47 1/4	26 1/4	42
<b>15x20</b>	9156-D-1516	9156-D-SS-1516	30	20	16	14	47 1/4	26 1/4	54
	9156-D-1512	9156-D-SS-1512	22	14	12	10	47 1/4	26 1/4	42
<b>16x22</b>	9156-D-1616	9156-D-SS-1616	30	20	16	14	47 1/4	26 1/4	54
	9156-D-1612	9156-D-SS-1612	22	14	12	10	47 1/4	26 1/4	42
12x19 or 12x20	9156-D-1216	9156-D-SS-1216	30	20	16	14	47 1/4	26 1/4	54
	9156-D-1212	9156-D-SS-1212	22	14	12	10	47 1/4	26 1/4	42
<b>Double Side Loaded, 2 Trays/Pair of Slides</b>									
<b>14x18</b>	9156-D-1432	9156-D-SS-1432	60	40	32	28	53 1/4	34 1/4	54
	9156-D-1424	9156-D-SS-1424	44	28	24	20	53 1/4	34 1/4	42
<b>15x20</b>	9156-D-1532	9156-D-SS-1532	60	40	32	28	57 1/4	36 1/4	54
	9156-D-1524	9156-D-SS-1524	44	28	24	20	57 1/4	36 1/4	42
12x19 or 12x20	9156-D-1232	9156-D-SS-1232	60	40	32	28	57 1/4	30 1/4	54
	9156-D-1224	9156-D-SS-1224	44	28	24	20	57 1/4	30 1/4	42

\*While ordering, please specify model number followed by capacity and desired spacing. For example, to order aluminum cart for 15"x20" trays, single end loaded with capacity of 14 on 6" spacings, specify model number 9156-D-1516-14-6. Other spacings and carts for different tray sizes are available. Please consult factory.

**Options:**

- |                                    |  |                                      |                                  |
|------------------------------------|--|--------------------------------------|----------------------------------|
| 1. Vinyl on all 4 sides (see note) | 4. Brakes on casters.                            | 7. Formica on all 4 sides (see note) | 9. No back. (open Front & back). |
| 2. 6" Poly casters.                | 5. Lockable latch.                               | 8. No doors.                         |                                  |
| 3. 6" Balloon casters.             | 6. Trapezoid channel slides for trapezoid trays. |                                      |                                  |

**Note:** Optional vinyl or formica are furnished in woodgrain. Other colors are available. Consult factory.

*Better food service equipment — standard models and custom designs.*



**Three door, extra heavy duty tray delivery cart for correctional facilities, non-insulated, stainless steel**


390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419

Fax (951) 340-2716

- **Exceptionally strong cart for transporting 13" x 15" x 2<sup>3</sup>/<sub>4</sub>" insulated trays and beverage containers for correctional facilities.**
- **Tamper-resistant, extra heavy duty all welded construction.**

This super-tough tray delivery cart is specially made for correctional facilities and can withstand lot of rough handling. 16 GA. S/S body, double wall 18 GA. S/S door filled with particle board, 1<sup>1</sup>/<sub>2</sub>" x 16 GA. S/S square tubing frame, 14 GA. S/S base reinforced with 14 GA. S/S channel bolsters, 11 GA. S/S hinges and full length door hasps with padlock capabilities, tamperproof screws, wrap around bumper, reinforced push handle and 8" balloon casters and all welded construction are standard. 12 GA S/S 4 sided top rail provides extra space for two bread baskets. For detailed specifications and construction details, please consult factory. Shorter height carts and other styles and sizes are also available.

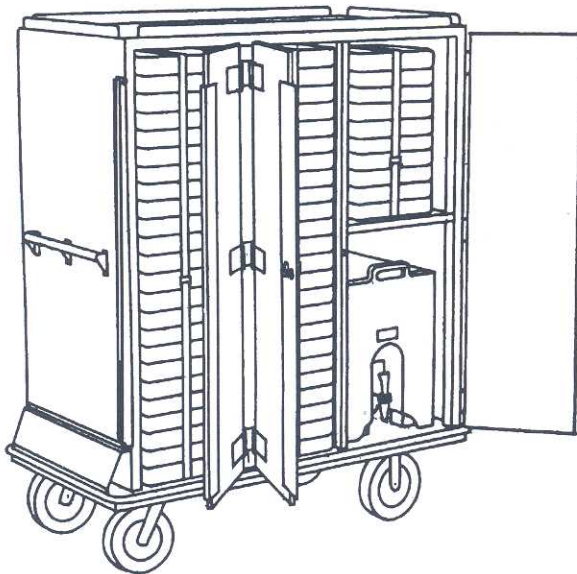

Model 2205-13-100-HD

Model Number	*Capacity (13" x 15" x 2 <sup>3</sup> / <sub>4</sub> " )	O.A. Dimensions (Inches)			Weight (Pounds)
		D	L	H	
2205-13-100-HD	100	31 <sup>1</sup> / <sub>2</sub>	64 <sup>1</sup> / <sub>2</sub>	72 <sup>1</sup> / <sub>2</sub>	640
2205-13-80-HD	80	31 <sup>1</sup> / <sub>2</sub>	64 <sup>1</sup> / <sub>2</sub>	60	490



\*In addition, the cart will carry two (2) bread baskets (26" x 28" x 7") and one (1) 10 gallon Cambro beverage container and 10 to 20 extra insulated trays depending on the model.

**Better food service equipment — standard models and custom designs.**

- Extra heavy duty cabinet made specially for correctional and other institutional use for holding, storing or delivering food in 10"x14" compartment trays.
- Additional reinforcement on two sides and a heavy duty aluminum bumper around the top makes it extremely rugged for long lasting service and provides excellent security.
- Offered in two styles.

For correctional & heavy duty institutional use in mind. Top & bottom are extra strong, heli-arc welded to the frame with additional reinforcing on the inside. Each cart comes with either two (1/2"x3/4") horizontal stabilizing bars or a middle shelf to prevent "racking". In addition each side is reinforced vertically in the middle with a heavy duty extrusion attached to the sides & welded at top & bottom.

**Other features include:**

- **Top:** Made from inner & outer panels each 0.063". In addition a 3/16" thick aluminum bumper is wrapped around the top to provide extra reinforcement.
- **Bottom:** 0.190" thick formed into one piece with welded corners & reinforced.
- **Sides:** 0.075" thick specially extruded aluminum panels with 0.075" thick x 1 3/4" wide slides on 3" centers. Panels have interlocking inverted "V" seams which are further strengthened at the joints.
- **Uprites:** 2"x1"x0.125" specially extruded channels.
- **Back:** 0.063" aluminum, brake formed at ends to join rear upright channels with extra reinforcement with horizontal brace.
- **Door:** 0.080" aluminum reinforced with 1"x1/2" x 0.125" aluming tubing & furnished with a door hold open device.
- **Casters:** 6"x2" deluxe, N.S.F., listed all swivel, balloon tread.
- **Latches:** 30" long, 18 ga. stainless lockable sliding latch.
- **Hinges:** 3 sets of 12 ga. stainless steel to permit 270° door swing.



Style "A"  
9156-HD-UA-10-48



Style "B"  
9156-HD-1014-76



**Style A = Food trays in upper section, wire baskets in lower section**

**Style B = All food trays (no wire baskets)**

Model Number	Style	Tray Size (Inches)	Tray Spacing (Inches)	Capacity		O.A. Dimensions (Inches) W x D x H	Weight (Pounds)
				Trays	18"x26" Wire Baskets		
9156-HD-UA-10-48	A	10 x 14 1/2 x 15/16	3	48	6	25 1/4 x 32 3/8 x 69 9/16	245
9156-HD-1014-76	B	10 x 14 1/2 x 15/16	3	76	-	25 1/4 x 32 3/8 x 69 9/16	230
<b>EXTRA LARGE CARTS</b>							
9156-HD-UA-10-72	A	10 9/16 x 14 1/8 x 1 1/4	3	72	**12	33 1/2 x 40 3/4 x 69 9/16	310
9156-HD-1014-114	B	10 9/16 x 14 1/8 x 1 1/4	3	114	-	33 1/2 x 40 3/4 x 69 9/16	298

\*\*Two wire baskets side loaded/pair of slides.

**NOTE:** Angle slides spacing of 2 1/4", 4 1/2" or 5 1/16" are also available. Correctional package is available. Consult factory. If ordering extra large carts, please make sure the door/hallway openings are large enough to accommodate these carts.

*Better food service equipment — standard models and custom designs.*

## Stainless steel tray delivery carts for correctional facilities, non-insulated

390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419

Fax (951) 340-2716

These heavy duty carts provide an effective and efficient delivery of meal trays in correctional or other heavy institutional food facilities. Body of non-insulated models is constructed of heavy gauge stainless steel with doors reinforced with 1" square s/s tubing. 14 ga reinforced deck & 12 ga. s/s hinges are standard. Correctional package is also available. Consult factory.



9156-HD-SS-2-64-1116



9156-D-SS-1115-60

### Heavy duty single door stainless steel delivery cabinet, non-insulated

(for thick insulated food trays)

- Heavy duty s/s construction.
- 6"x 2" heavy duty casters.



Model Number	Tray Size (Inches)	Tray Capacity	Shelf Clearance (Inches)	O.A. Dimensions (Inches) W x D x H	Weight (Pounds)
9156-HD-SS-2-64-1116	11 x 16 x 2 <sup>3</sup> / <sub>4</sub> (Duralux T-140)	*64	25	26 <sup>1</sup> / <sub>2</sub> x 36 <sup>7</sup> / <sub>8</sub> x 62	260

\*8 trays/stack (4 stacks in top section, 4 stacks in bottom section)

NOTE 1: Correctional package is available. Aluminum construction is also available. Consult factory.

NOTE 2: This model will also carry 72 Duralux T-240 (11<sup>1</sup>/<sub>4</sub>" x 15<sup>1</sup>/<sub>2</sub>" x 2<sup>2</sup>/<sub>5</sub>"thk) trays (9 trays/stack) or 56 Plastcon (10<sup>3</sup>/<sub>4</sub>" x 14<sup>1</sup>/<sub>2</sub>" x 1<sup>1</sup>/<sub>4</sub>"thk) trays (7 trays/stack).

### Double section s/s tray delivery cart, non-insulated for correctional facilities

- Heavy duty construction.
- Wrap around bumper, 6"x 2" casters & push handle are standard.

Model Number	Tray Size (Inches)	Tray Spacing (Inches)	Tray Capacity	O.A. Dimensions (Inches) W x D x H	Weight (Pounds)
9156-D-SS-1115-60	11 <sup>1</sup> / <sub>2</sub> x 15 <sup>1</sup> / <sub>2</sub> x 1 <sup>5</sup> / <sub>16</sub> (Duralux T-500)	3	60	42 <sup>3</sup> / <sub>8</sub> x 29 <sup>7</sup> / <sub>8</sub> x 55 <sup>7</sup> / <sub>8</sub>	322
*9156-D-SS-1116-64	11 x 16 x 2 <sup>3</sup> / <sub>4</sub> (Duralux T-140)	Stacked (8/stack)	64	42 <sup>3</sup> / <sub>8</sub> x 29 <sup>7</sup> / <sub>8</sub> x 55 <sup>7</sup> / <sub>8</sub>	320

\*This model is furnished without slides. Trays are stacked 8 high (4 stacks in each section).

NOTE: Insulated cabinets are also available. Aluminum construction is also available. Consult factory.

*Better food service equipment — standard models and custom designs.*

B-24



These heavy duty carts provide an effective and efficient delivery of meal trays in correctional or other heavy institutional food facilities. 14 ga reinforced deck & 12 ga. s/s hinges are standard. All models use 1 1/2" fiberglass insulation, 22 ga. inner & 20 ga. outer (18 ga. optional). Correctional package is also available. Consult factory. Slides are welded to uprights.



**2150-910-96**  
 (with optional correctional package)



**2150-HD-2-1015-64**  
 (with optional correctional package)

**Single door, heavy duty insulated s/s tray delivery cabinet for correctional facilities**

- Two compartment with single door.
- Heavy duty double wall insulated construction.
- 5" casters, 14 ga. deck and wrap around bumper are standard.

Model Number	Tray Size (Inches)	Tray Spacing (Inches)	Tray Capacity	O.A. Dimensions (Inches) W x D x H	Weight (Pounds)
<b>2150-910-96</b>	<b>Duralux</b> FC 431/FC 442 9 x 10 1/2 x 2 1/2	3	96	31 1/2 x 38 3/4 x 62 1/2	396



Additional correctional package is available. Aluminum construction is also available. Consult factory.

**Double & triple section insulated stainless steel tray delivery cart**

- Heavy duty construction & fully insulated.
- Wrap around bumper, 6"x 2" casters & push handle are standard.

(For 10 3/4"x 15" or 11 1/2"x 15 1/2" trays)

Model Number	Type of Door	Tray Spacing (Inches)	Tray Capacity	O.A. Dimensions (Inches) W x D x H	Weight (Pounds)
<b>2150-HD-2-1015-64</b>	<b>Double</b>	3	64	48 1/2 x 31 1/2 x 64 1/2	425
<b>2150-HD-3-1015-96</b>	<b>Triple</b>	3	96	69 1/2 x 31 1/2 x 64 1/2	550

**NOTE:** Carts are also available with heating unit to serve as holding cabinets. Carts can also be furnished without slides to stack insulated trays in all sections. Aluminum construction is also available. Consult factory.

- **All stainless steel construction.**
- **Adjustable shelves & 2 full height doors.**
- **Choice of stationary or mobile units.**

These stainless steel cabinets are ideal for the storage of pots, pans, utensils, cans, boxes & other miscellaneous items. Shelves are adjustable and heavy duty constructions is standard.

**Body:** Constructed of stainless steel panels with solid base and top. Four vertical channels with key holes on 1 ½” centers are provided to hold shelves in place.

**Doors:** Heavy gauge stainless steel doors reinforced with 1” square s/s tubing and supported by stainless steel hinges. A 3 point latching system which secures the doors at top, middle and bottom and a built in lock are standard.

**Shelves:** Stainless steel shelves with edges turned down and in for rigidity are standard. Optional single and double reinforced shelves are available. Shelves are adjustable on 1 ½” centers.



Model S5100-4-2436-78-S

Model Number	No. of Intermediate Shelves	O.A. Dimensions (Inches)			Weight (Pounds)
		D	L	H	
S5100-2-1836-48-S	2	18	36	48	100
S5100-4-1836-78-S	4	18	36	78	205
S5100-2-2436-48-S	2	24	36	48	110
S5100-4-2436-78-S	4	24	36	78	225



### Options:

1. For mobile unit with 5” casters ( in lieu of 6” stationary legs), replace “-S” by “-M” in model number. O.A. height remains approximately the same.
2. These cabinets are also available without base with no stationary legs. O.A. height will be approximately 6” less.
3. Single or double reinforced shelves are also available. Consult factory.
4. Fixed (non removable) shelves.