

- All welded heavy duty construction.
- Ideal for correctional institutions and for facilities requiring extra strong shelving units.
- No removable parts.
- Available in louvered or solid shelves with choice of stationary or mobile units.
- N.S.F. listed.



Louvered Shelves Type Stationary Unit Model 2305-2460



Louvered Shelves Type Mobile Unit Model 2305-2460-M (with optional brakes & rotating bumpers)

Specifications:

- **Shelves:** 14 GA. polished stainless steel type 304 with notched corners. Edges are turned down 90° and turned in at 45°. Shelves are continuously welded to uprites and equally spaced. Louvered shelves have opening spaced on 2" centers. Bottom shelf is welded at approx. 10" above the floor level.
- **Uprites:** 1 5/8" O.D. heavy wall polished stainless steel, type 304 with welded stainless steel cap at top. Adjustable S/S bullet feet are welded to uprites at the bottom for stationary units.
- **Casters:** 5" heavy duty swivel, N.S.F. listed, for mobile units (optional).

4 Tier Stationary Units (O.A. Height 61")

Shelf Size (Inches)	*Model Number	
	Louvered Shelves	Solid Shelves
18x36	2305-1836	2306-1836
18x42	2305-1842	2306-1842
18x48	2305-1848	2306-1848
18x54	2305-1854	2306-1854
18x60	2305-1860	2306-1860
21x36	2305-2136	2306-2136
21x42	2305-2142	2306-2142
21x48	2305-2148	2306-2148
21x54	2305-2154	2306-2154
21x60	2305-2160	2306-2160
24x36	2305-2436	2306-2436
24x42	2305-2442	2306-2442
24x48	2305-2448	2306-2448
24x54	2305-2454	2306-2454
24x60	2305-2460	2306-2460
27x36	2305-2736	2306-2736
27x42	2305-2742	2306-2742
27x48	2305-2748	2306-2748
27x54	2305-2754	2306-2754
27x60	2305-2760	2306-2760

***For mobile units, add "-M" after the model number. O.A. height for mobile units is 66"**

O.A. size is 1 5/8" larger than shelf size.

Options:

1. Mobile unit (5" casters, all swivel)
2. Brakes on Casters.
3. 6" Casters.
4. Rotating Bumpers.
5. Extra Shelf
6. Extra Height (up to 78" for certain sizes)
7. Louver spacing larger than 2".
8. Louvered & solid shelves combination on same unit.
9. Casters welded to uprites.
10. Special shelf size.
11. 16 GA. shelves (instead of 14 ga.)

NOTE: Solid shelves type units are also available with lengthwise channels. Add "-CS" after solid shelf model number. Priced same as louvered shelf type.



SAMMONS EQUIPMENT MANUFACTURING CORPORATION Shammi Industries

Stainless steel shelving adjustable, standard and heavy duty

390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419

Fax (951) 340-2716

- Heavy duty and standard duty units with adjustable shelves.
- Unique corner gussets eliminating unsanitary crevices.
- Available in louvered or solid shelves with choice of stationary or mobile units.
- N.S.F. listed

NOTE: Solid shelf type units are also available with lengthwise channels.

Add "-CS" after solid shelf model number. Priced same as louvered shelf type.

These shelving units allow quick installation and adjustable spacing by locking corner gussets with a set screw at the desired height.

Specifications:

- **Shelves:** 16 Ga. (for heavy duty) and 18 Ga. (for standard duty) stainless steel type 304 with notched corners and special heavy duty die cast corner gussets. Shelves are fully adjustable.
- **Uprites:** 1 1/2" O.D. heavy wall polished S/S type 304 tubing with capped top and adjustable S/S bullet feet at bottom for stationary units.
- **Casters:** 5" heavy duty, swivel N.S.F. listed for mobile units.
- **O.A. Height:** 61" with bullet feet, 66" with casters.
- Shipped knocked down (K.D.) for easy assembly.



Louvered Shelves Type -
Stationary Unit
Model 2307-HD-2448



Louvered Shelves Type -
Mobile Unit
Model 2307-HD-2448-M

4 Tier Stationary Units (O.A. Height 61") Heavy Duty Models (16 Ga. shelves)

Shelf Size (inches)	*Model Number	
	Louvered Shelves	Solid Shelves
18x36	2307-HD-1836	2308-HD-1836
18x42	2307-HD-1842	2308-HD-1842
18x48	2307-HD-1848	2308-HD-1848
18x54	2307-HD-1854	2308-HD-1854
18x60	2307-HD-1860	2308-HD-1860
21x36	2307-HD-2136	2308-HD-2136
21x42	2307-HD-2142	2308-HD-2142
21x48	2307-HD-2148	2308-HD-2148
21x54	2307-HD-2154	2308-HD-2154
21x60	2307-HD-2160	2308-HD-2160
24x36	2307-HD-2436	2308-HD-2436
24x42	2307-HD-2442	2308-HD-2442
24x48	2307-HD-2448	2308-HD-2448
24x54	2307-HD-2454	2308-HD-2454
24x60	2307-HD-2460	2308-HD-2460
27x36	2307-HD-2736	2308-HD-2736
27x42	2307-HD-2742	2308-HD-2742
27x48	2307-HD-2748	2308-HD-2748
27x54	2307-HD-2754	2308-HD-2754
27x60	2307-HD-2760	2308-HD-2760

Options:

1. Mobile unit (5" casters, all swivel).
2. Brakes on casters.
3. 6" casters.
4. Rotating bumpers.
5. Extra shelf.
6. Extra height (up to 78" for certain sizes).
7. Louver spacing larger than 2".
8. Louvered & solid shelves combination on same unit.
9. Casters welded to uprites.
10. Special shelf size.
11. 14 Ga. Shelves



4 Tier Stationary Units (O.A. Height 61") Standard Duty Models (18 Ga. shelves)

Shelf Size (inches)	*Model Number	
	Louvered Shelves	Solid Shelves
18x36	2307-1836	2308-1836
18x42	2307-1842	2308-1842
18x48	2307-1848	2308-1848
18x54	2307-1854	2308-1854
18x60	2307-1860	2308-1860
21x36	2307-2136	2308-2136
21x42	2307-2142	2308-2142
21x48	2307-2148	2308-2148
21x54	2307-2154	2308-2154
21x60	2307-2160	2308-2160
24x36	2307-2436	2308-2436
24x42	2307-2442	2308-2442
24x48	2307-2448	2308-2448
24x54	2307-2454	2308-2454
24x60	2307-2460	2308-2460
27x36	2307-2736	2308-2736
27x42	2307-2742	2308-2742
27x48	2307-2748	2308-2748
27x54	2307-2754	2308-2754
27x60	2307-2760	2308-2760

*For mobile units, add "-M" after the model number. O.A. height for mobile units is 66"

Better food service equipment — standard models and custom designs.

- Quick, efficient and economical units.
- Choice of louvered or solid shelves in either stationary or mobile units.

- Easily adjustable with round stainless steel corner gussets.
- N.S.F. listed.

NSF®

- These economy units are ideal for backroom storage or for other practical storage applications due to quick and easy installation. Adjustable bullet feet provide for easy leveling and set screws allow desired shelf spacing. Unit is shipped knocked down for easy assembly.
- **Shelves:** 18 ga. stainless steel type 304 with round S/S corner gussets and set screws. Shelves are fully adjustable.
- **Uprights:** 1" O.D. stainless steel tubing with capped top and adjustable feet (for stationary units).
- **Casters:** 5" swivel, N.S.F. listed. (For mobile units).
- **O.A. Height:** 61" with bullet feet, 66" with casters.



Louvered Shelves Type Stationary unit Model 2311-2448

4 Tier Stationary Units (O.A. Height 61")

Shelf Size (inches)	*Model Number	
	Louvered Shelves	Solid Shelves
18x36	2311-1836	2312-1836
18x42	2311-1842	2312-1842
18x48	2311-1848	2312-1848
18x54	2311-1854	2312-1854
18x60	2311-1860	2312-1860
21x36	2311-2136	2312-2136
21x42	2311-2142	2312-2142
21x48	2311-2148	2312-2148
21x54	2311-2154	2312-2154
21x60	2311-2160	2312-2160
24x36	2311-2436	2312-2436
24x42	2311-2442	2312-2442
24x48	2311-2448	2312-2448
24x54	2311-2454	2312-2454
24x60	2311-2460	2312-2460




Louvered Shelves Type Mobile Unit Model 2311-2448-M (with optional 5" H.D. casters)

***For mobile units, add "-M" after the model number. O.A. height for mobile units is 66"**

O.A. size is 1^{5/8}" larger than shelf size.

Options:

1. Mobile unit (5" casters, all swivel)
2. Brakes on Casters.
3. 6" Casters.
4. Rotating Bumpers.
5. Extra Shelf
6. Extra Height (up to 78" for certain sizes)
7. Louver spacing larger than 2".
8. Louvered & solid shelves combination on same unit.
9. Casters welded to uprights.
10. Special shelf size.



Solid Shelves Type Mobile Unit

Better food service equipment — standard models and custom designs.



SAMMONS EQUIPMENT

MANUFACTURING CORPORATION
Shammi Industries

Dunnage racks, stainless steel

390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419

Fax (951) 340-2716

- Excellent dunnage racks for “above floor” storage
- Available in louvered or solid shelf with choice of stationary or mobile units.

- All welded construction
- N.S.F. listed.



Louvered Type 2314-2454



Solid Shelf Type with optional lengthwise channels
2313-2448-CS

***Stationary Units (Height 12” above floor)**

Shelf Size (inches)	*Model Number	
	Louvered Shelf	Solid Shelf
18x36	2314-1836	2313-1836
18x42	2314-1842	2313-1842
18x48	2314-1848	2313-1848
18x54	2314-1854	2313-1854
21x36	2314-2136	2313-2136
21x42	2314-2142	2313-2142
21x48	2314-2148	2313-2148
21x54	2314-2154	2313-2154
21x60	2314-2160	2313-2160
24x36	2314-2436	2313-2436
24x42	2314-2442	2313-2442
24x48	2314-2448	2313-2448
24x54	2314-2454	2313-2454
24x60	2314-2460	2313-2460
27x42	2314-2742	2313-2742
27x48	2314-2748	2313-2748
27x54	2314-2754	2313-2754
27x60	2314-2760	2313-2760

NOTE: Solid shelves type dunnage racks are also available with lengthwise channels. Add “-CS” after solid shelf model number. Priced same as louvered shelf type.

Specifications:

- **Shelf:** 16 ga. stainless steel type 304. (14 ga. optional)
- **Legs:** 1⁵/₈” O.D. polished stainless steel tubing type 304 with adjustable S/S bullet feet for stationary models. O.A. height is 12” above floor.

Optional mobile units are available with 5” swivel casters.

Options:

1. Different shelf size (consult factory).
2. Mobile units (5” casters).
3. Brakes on casters.
4. Revolving bumpers.
5. 14 ga. S/S top (welded)
6. 14 ga. S/S top (removable)

NSF®

***For mobile units, add “-M” after the model number.**

Better food service equipment — standard models and custom designs.



Dunnage racks, aluminum & stainless steel

390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419

Fax (951) 340-2716

- All welded construction • Rust proof & sanitary • N.S.F. approved

These dunnage racks find excellent use in freezers, and other storage and packaging areas.

Available in various sizes. Constructed of 1½" x 1¾" x 0.070" hi-tensile rectangular aluminum tube (6063-T5) or 1½" x 1½" heavy wall S/S tubing.



Aluminum
Model 9090-1836-8



Optional Mobile Unit
9090-M-1836 with 5" casters.
(shown with 2 optional push handles)

*Aluminum Models

Shelf Size	No. of Laterals	8" High		12" High	
		Model #	Weight (lbs.)	Model #	Weight (lbs.)
18x36	4	9090-1836-8	9	9090-1836-12	10
18x48	4	9090-1848-8	11	9090-1848-12	12
18x60	4	9090-1860-8	13	9090-1860-12	14
20x36	4	9090-2036-8	9	9090-2036-12	10
20x48	4	9090-2048-8	11	9090-2048-12	12
20x60	4	9090-2060-8	13	9090-2060-12	14
24x36	5	9090-2436-8	11	9090-2436-12	12
24x48	5	9090-2448-8	14	9090-2448-12	15
24x60	5	9090-2460-8	16	9090-2460-12	17
27x36	5	9090-2736-8	12	9090-2736-12	13
27x48	5	9090-2748-8	15	9090-2748-12	16
27x60	5	9090-2760-8	18	9090-2760-12	19

*For stainless steel models, add "-SS" after model number.

Option: Mobile units with 5" or 6" casters with or without push handle(s). Consult factory.

Better food service equipment — standard models and custom designs.

G-5



Boxed beef truck, aluminum & stainless steel

390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419



Fax (951) 340-2716

- Ideal for transporting boxed beef, produce, fish, dry goods, poultry and other packaged meats and items.
- Heli-arc all welded construction.
- Rust proof and sanitary.
- N.S.F. listed.

These trucks are constructed of 1½" x 1¾" x 0.070" high tensile (6063-T5) rectangular tubing or 1½" x 1½" x 16 GA. stainless steel tubing.



Model 9130

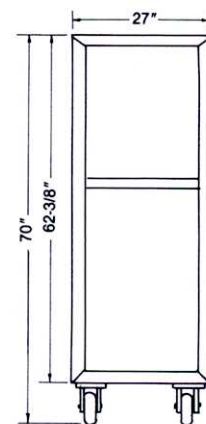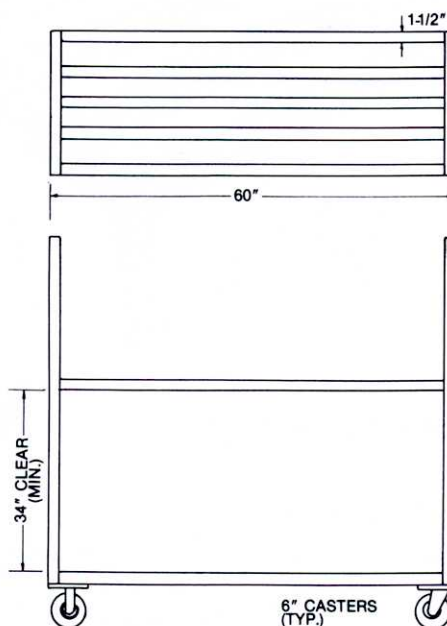

Aluminum Model No. 9130

Stainless Steel Model No. 9130-SS

- **Shelf size:** 27"x60"
- **Casters:** 6" deluxe, N.S.F. approved (2 rigid, 2 swivel)
- **O.A. Dimensions:** 27"x60"x70" high.

- **Space between shelves:** 34"
- **Number of shelves:** 2
- **Shipping weight:** 73 pounds (Alum) 130 pounds (S/S)



Options: A. Push handle
B. 5" poly casters

C. 6" poly casters
D. 8" poly casters

E. Extra shelf
F. Corner bumpers

Better food service equipment — standard models and custom designs.

- Fully adjustable with choice of 4 type of shelves.
- Sanitary and rust proof and available in 4 different types of shelves which can also be mixed and matched.

These shelving units use 1" schedule 40 aluminum pipe ($1\frac{1}{16}$ " O.D., 6061/6063 alloy) as posts marked on 2" increments and heavy duty extruded aluminum collars welded in place at corners of each shelf. A set screw in each collar allows the shelves to be adjustable and helps lock the shelves in place at selected heights. Posts and shelves are shipped loose (knocked down). Posts have plastic caps at top & bottom.

Tubing type



- Uses $1\frac{1}{2}$ " x $1\frac{3}{4}$ " heavy wall extruded aluminum rectangular tubing frame and laterals welded lengthwise. Specify model 9355-RT followed by no. of shelves and shelf sizes.

4 Shelf Model
9355-RT-4-1842

T-bar type



- Uses $1\frac{1}{2}$ " x $1\frac{3}{4}$ " heavy wall extruded aluminum tubing frame and $2\frac{1}{2}$ " wide x 1" x 0.100" thick T-bars welded widthwise $1\frac{3}{4}$ " apart. Specify model 9355-TB followed by no. of shelves and shelf size.

3 Shelf Model
9355-TB-3-1842

Solid shelf type



- Uses solid aluminum shelf flanged down $1\frac{3}{4}$ " on all four sides. Specify model 9355-SL followed by no. of shelves and shelf size.



2 Shelf Model
9355-SL-2-1842

Reinforced solid shelf type



- Same as solid shelf type except additionally reinforced with one or two laterals using $1\frac{1}{2}$ " x $1\frac{3}{4}$ " alum. tube. Specify model 9355-SLR followed by no. of shelves and shelf size.

3 Shelf Model
9355-SLR-3-1842

*Available Sizes				
Widths	15", 18", 20", & 24"			
Lengths	30", 36", 42", 48", 54" & 60"			
Posts Height for:	2 shelf	3 shelf	4 shelf	5 shelf
	54"	68"	76"	84"

*Size (width, length) & height restrictions apply. Consult factory for proper combination prior to ordering.

Options:


1. 5" casters for mobile units. 2. Adjustable feet.

Better food service equipment — standard models and custom designs.


- Heavy duty all welded construction.
- Choice of rectangular tubing type or T-bar type shelves.
- Rust proof and sanitary.
- Optional flat aluminum or stainless steel shelves and optional mobile units available.

Tubing type

- 1 1/2"x1 3/4"x0.070" high tensile rectangular tubing frame with horizontal laterals welded lengthwise. Specify model 9351-RT followed by no. of shelves and shelf size.

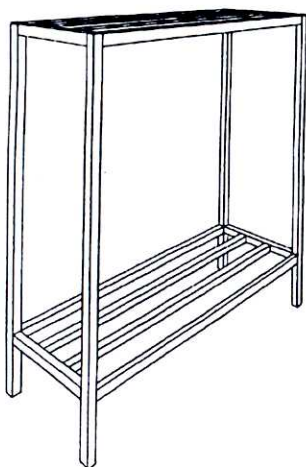


2 Shelf (24"x60") Tubing type
Stationary Unit 9351-RT-2-2460

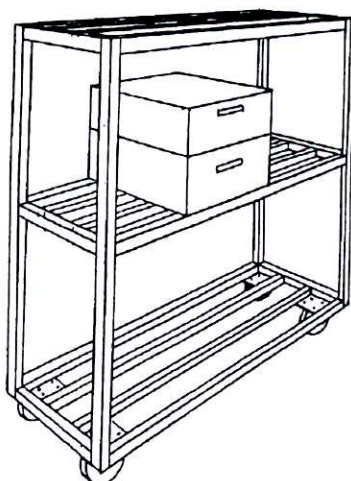

3 Shelf (24"x60") Tubing type
Mobile Unit 9351-RT-3-2460-M

T-Bar type

- 1 1/2"x1 3/4"x0.070" high tensile rectangular tubing frame with 2 1/2" wide x 0.100" thick T-bars welded widthwise 1 3/4" apart. Specify model 9351-TB followed by no. of shelves and shelf size.

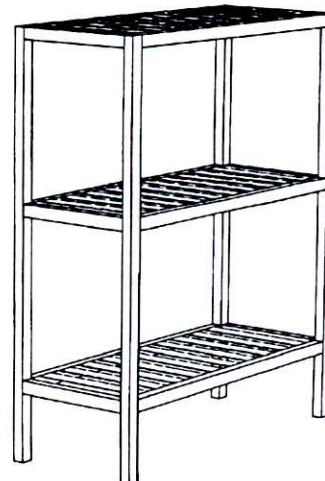

3 Shelf (24"x60") T-Bar type
Stationary Unit 9351-TB-3-2460

Available Sizes



No. of Shelves	Width (inches)	Length (inches)	Height (inches)	Shelf clearance (Inches)
2	20 & 24	36, 48, 60 & 72	48	34 1/2
3	20 & 24	36, 48, 60 & 72	60	22 1/2
4	20 & 24	36, 48, 60 & 72	72	18 1/2

Options:

1. Mobile unit with 6" plate casters for up to 60" in height for certain sizes. (Consult factory for size/height limitations)
Add "-M" after the model size.
2. Special size and/or spacing (consult factory).
3. Adjustable feet.
4. Removable flat alum. sheet for each shelf.
5. Removable flat S/S sheet (18 ga.) for each shelf.

Better food service equipment — standard models and custom designs.

Stainless steel top tables, with undershelves

- Choice of standard 14 ga. stainless steel top or economical 16 ga. S/S top.
- Available with all 4 edges down or with 1½" back splash.



Construction:

- **Stainless Steel Series** offers 14 ga. stainless steel top, 18 ga. stainless steel undershelf and 1½" O.D. x 16 ga. S/S tubular legs with adjustable S/S bullet feet.
- **Galvanized Series** offers 14 ga. stainless steel top, 18 ga. Galvanized undershelf and 1½" O.D. x 16 ga. galvanized tubular legs with adjustable metal bullet feet.
- Hat sections with welded gussets reinforce and maintain top level working surface.
- Mobile units are available with 5" all swivel casters. Economy models are also available with 16 ga S/S. top. Corners of top are heli arc welded and ground and polished. O.A. height is approximately 35½". Undershelf is approx. 10" from floor. All units are shipped knocked down. (K.D.)

TOP WITH ALL EDGES DOWN



Stationary Model
2601-2448



Mobile Model
2601-2448-M

TOP WITH 1½" BACKSPLASH



Stationary Model
2602-2448



Mobile Model
2602-2448-M

Model Numbers for Stationary Tables (With all edges down and undershelf)

Length		24" Wide		30" Wide		36" Wide	
Inches	Feet	Stainless Series	Galvanized Series	Stainless Series	Galvanized Series	Stainless Series	Galvanized Series
24"	2'	2601-2424	2601-G-2424	2601-3024	2601-G-3024	2601-3624	2601-G-3624
36"	3'	2601-2436	2601-G-2436	2601-3036	2601-G-3036	2601-3636	2601-G-3636
48"	4'	2601-2448	2601-G-2448	2601-3048	2601-G-3048	2601-3648	2601-G-3648
60"	5'	2601-2460	2601-G-2460	2601-3060	2601-G-3060	2601-3660	2601-G-3660
72"	6'	2601-2472	2601-G-2472	2601-3072	2601-G-3072	2601-3672	2601-G-3672
*84"	*7'	2601-2484	2601-G-2484	2601-3084	2601-G-3084	2601-3684	2601-G-3684
*96"	*8'	2601-2496	2601-G-2496	2601-3096	2601-G-3096	2601-3696	2601-G-3696
*108"	*9'	2601-24108	2601-G-24108	2601-30108	2601-G-30108	2601-36108	2601-G-36108
*120"	*10'	2601-24120	2601-G-24120	2601-30120	2601-G-31020	2601-36120	2601-G-36120

Model Numbers for Stationary Tables (With 1½" backsplash and undershelf)

Length		24" Wide		30" Wide		36" Wide	
Inches	Feet	Stainless Series	Galvanized Series	Stainless Series	Galvanized Series	Stainless Series	Galvanized Series
24"	2'	2602-2424	2602-G-2424	2602-3024	2602-G-3024	2602-3624	2602-G-3624
36"	3'	2602-2436	2602-G-2436	2602-3036	2602-G-3036	2602-3636	2602-G-3636
48"	4'	2602-2448	2602-G-2448	2602-3048	2602-G-3048	2602-3648	2602-G-3648
60"	5'	2602-2460	2602-G-2460	2602-3060	2602-G-3060	2602-3660	2602-G-3660
72"	6'	2602-2472	2602-G-2472	2602-3072	2602-G-3072	2602-3672	2602-G-3672
*84"	*7'	2602-2484	2602-G-2484	2602-3084	2602-G-3084	2602-3684	2602-G-3684
*96"	*8'	2602-2496	2602-G-2496	2602-3096	2602-G-3096	2602-3696	2602-G-3696
*108"	*9'	2602-24108	2602-G-24108	2602-30108	2602-G-30108	2602-36108	2602-G-36108
*120"	*10'	2602-24120	2602-G-24120	2602-30120	2602-G-31020	2602-36120	2602-G-36120

NOTE:

1. For Mobile Units with 5" casters, add "-M" after the model number.
- *2. Unit 7' and longer are furnished with six (6) legs.

OPTIONS:

1. Economy models with 16 ga S/S top.
2. 5" Swivel Casters
3. Rotating Bumpers
4. Brakes on Casters
5. S/S Drawer

Better food service equipment — standard models and custom designs.

- Choice of standard (14 ga.) or economy (16 ga.) stainless steel top.
- Available with all 4 edges down or with 1 1/2" back splash.



Construction:

- **Stainless Steel Series** offers 14 ga. stainless steel top, 1 5/8" O.D. x 16 ga. stainless steel tubular legs with adjustable S/S bullet feet and S/S tubular cross rails on 2 sides and rear.
- **Galvanized Series** offers 14 ga. stainless steel top, 1 5/8" O.D. x 16 ga. galvanized tubular legs with adjustable metal bullet feet and galvanized tubular cross rails on 2 sides and rear.
- Hat sections with welded gussets reinforce and maintain top level working surface.
- Mobile units are available with 5" all swivel casters. Economy models are also available with 16 ga S/S. top. Corners of top are heli arc welded and ground and polished. O.A. height is approximately 35 1/2". **All units are shipped knocked down. (K.D.)**

TOP WITH ALL EDGES DOWN



Stationary Model
2603-2448



Mobile Model
2603-2448-M

Model Numbers for Stationary Tables (With all edges down top and open base)

Length		24" Wide		30" Wide		36" Wide	
Inches	Feet	Stainless Series	Galvanized Series	Stainless Series	Galvanized Series	Stainless Series	Galvanized Series
24"	2'	2603-2424	2603-G-2424	2603-3024	2603-G-3024	2603-3624	2603-G-3624
36"	3'	2603-2436	2603-G-2436	2603-3036	2603-G-3036	2603-3636	2603-G-3636
48"	4'	2603-2448	2603-G-2448	2603-3048	2603-G-3048	2603-3648	2603-G-3648
60"	5'	2603-2460	2603-G-2460	2603-3060	2603-G-3060	2603-3660	2603-G-3660
72"	6'	2603-2472	2603-G-2472	2603-3072	2603-G-3072	2603-3672	2603-G-3672
*84"	*7'	2603-2484	2603-G-2484	2603-3084	2603-G-3084	2603-3684	2603-G-3684
*96"	*8'	2603-2496	2603-G-2496	2603-3096	2603-G-3096	2603-3696	2603-G-3696
*108"	*9'	2603-24108	2603-G-24108	2603-30108	2603-G-30108	2603-36108	2603-G-36108
*120"	*10'	2603-24120	2603-G-24120	2603-30120	2603-G-31020	2603-36120	2603-G-36120

Model Numbers for Stationary Tables (With 1 1/2" backsplash and open base)

Length		24" Wide		30" Wide		36" Wide	
Inches	Feet	Stainless Series	Galvanized Series	Stainless Series	Galvanized Series	Stainless Series	Galvanized Series
24"	2'	2604-2424	2604-G-2424	2604-3024	2604-G-3024	2604-3624	2604-G-3624
36"	3'	2604-2436	2604-G-2436	2604-3036	2604-G-3036	2604-3636	2604-G-3636
48"	4'	2604-2448	2604-G-2448	2604-3048	2604-G-3048	2604-3648	2604-G-3648
60"	5'	2604-2460	2604-G-2460	2604-3060	2604-G-3060	2604-3660	2604-G-3660
72"	6'	2604-2472	2604-G-2472	2604-3072	2604-G-3072	2604-3672	2604-G-3672
*84"	*7'	2604-2484	2604-G-2484	2604-3084	2604-G-3084	2604-3684	2604-G-3684
*96"	*8'	2604-2496	2604-G-2496	2604-3096	2604-G-3096	2604-3696	2604-G-3696
*108"	*9'	2604-24108	2604-G-24108	2604-30108	2604-G-30108	2604-36108	2604-G-36108
*120"	*10'	2604-24120	2604-G-24120	2604-30120	2604-G-31020	2604-36120	2604-G-36120

NOTE:

1. For Mobile Units with 5" casters, add "-M" after the model number.
- *2. Unit 7' and longer are furnished with six (6) legs.

OPTIONS:

1. Economy models with 16 ga S/S top. Add "-EC" after the model number
2. 5" Swivel Casters
3. Rotating Bumpers
4. Brakes on Casters
5. S/S Drawer

Better food service equipment — standard models and custom designs.

- Mobile units for convenient food preparation
- Ideal for small slicers, mixers and other similar equipment
- Optional utensil / pots and pan storage rack available.
- Welded, heavy duty construction.

Portable Table / Slicer Stands



Model
2607-2730-3

Model
2607-2730-4

Mixer / Equipment Stands



NSF

Model 2607-2530-SL
with optional utensil / pots and pan rack

All units use 14 Ga. polished S/S top reinforced with heavy gauge hat channel and 1 5/8" O.D. heavy wall S/S tubular legs with 5" heavy duty casters, 2 with brakes. Portable tables/slicer stands are offered with 3 or 4 sets of channel slides to support 18"x26" bun pans or with solid middle and bottom shelves. **Mixer / Equipment stands have one 18 Ga. S/S undershelf.**

Optional (Accessory) Pots & Pan Storage Rack

1 5/8" O.D. S/S removable post with O.A. height to 70", has five 3/8" dia. x 6" long bars welded at sloping angles to the post and staggered to hold various utensils/pots & pans.

Type	Model Number	Overall Dimensions (Inches)			Type of Understructure
		Width	Depth	Height	
Portable Table / Slicer Stand	2607-2730-3	27 5/8	30 3/8	30	Open with 3 sets of slides
	2607-2730-4	27 5/8	30 3/8	34	Open with 4 sets of slides
	2607-2730-2SL	27 5/8	30 3/8	34	Solid Middle & bottom shelves
Mixer/ Equipment Stand	2607-2530-SL	25	30 3/8	26	One solid bottom shelf

Options:

1. Accessory Pots & Pan storage rack.
2. Polyurethane casters.
3. Brakes on all 4 swivel casters.

Better food service equipment — standard models and custom designs.



SAMMONS EQUIPMENT

MANUFACTURING CORPORATION
Shammi Industries

Mini shelf cart & heavy duty machine stands, aluminum & stainless steel

390-A Meyer Circle, Corona, California 92879-1078

Phone (951) 340-3419

Fax (951) 340-2716

Mini-Shelf Carts

- Ideal for food service and handling of small loads in restaurants, hotel kitchens and hospitals.
- All welded construction for longer life, comes completely assembled.
- 500# capacity aluminum carts.
- 650# capacity S.S. carts.

Specifications:

- **Shelves:** 0.063" aluminum or 18 GA. stainless steel.
- **Legs:** 0.125" aluminum or 14 GA. stainless steel.
- **Casters:** 5" all swivel.
- **Overall Height:** 35 3/4".



Model 1840



Model 1641

(Shown with optional push handle)

Shelf Size (Inches)	Aluminum			Stainless Steel		
	Model Number		Weight (Pounds)	Model Number		Weight Pounds
	Edges Down	Edges Up		Edges Down	Edges Up	
16x30	1540	1541	24	1540-SS	1541-SS	39
18x27	1640	1641	25	1640-SS	1641-SS	41
20x36	1740	1741	27	1740-SS	1741-SS	47
23x34	1840	1841	29	1840-SS	1841-SS	51

Options:

- (A) 5" plate casters.
- (B) Push handle with donut bumpers.
- (C) Corner bumpers.
- (D) Extra shelf.

Heavy Duty Machine Stands

- Designed for heavy slicers, mixers, grinders & other kitchen machines.
- Heavy gauge material with 5" deluxe casters.

Specifications:

- **Top Shelf:** 14 GA. S/S or 0.125" alum.
- **Bottom Shelf:** 18 GA. S/S or 0.125" alum.
- **Uprights:** 14 GA. S/S or 0.125" alum.
- **Casters:** 5"x1 1/4" deluxe. (all swivel)



Model HF-6355-23-HD-SS



Type	Top Shelf Size	Model No.	Overall Size (Inches) W-L-H	Weight (lbs.)
Aluminum	23 3/4" x 24 3/4"	HF6355-23HD-AL	23 3/4 x 24 3/4 x 23	28
	28" x 28"	HF6355-28HD-AL	28 x 28 x 26	32
Stainless Steel	23 3/4" x 24 3/4"	HF6355-23HD-SS	23 3/4 x 24 3/4 x 23	36
	28" x 28"	HF6355-28HD-SS	28 x 28 x 26	40

Options:

- 1. Anodized aluminum.
- 2. Brakes on casters.
- 3. Bottom shelf all edges up or all edges down.
- 4. Adjustable feet (in lieu of casters.)

Better food service equipment — standard models and custom designs.

H-4


Canned fuel room service hot food box carrier, kitchen truck & subway grating

Canned fuel type room service hot food carrier box, aluminum (fits under most room service tables)

- Lightweight aluminum construction (weighs only 12#)
- Convenient handle for easy pick-up
- Easy door opening/closing
- Eight vent holes for normal flame consistency
- Removable perforated S/S shelf for proper heat circulation
- Easy stretch spring holds fuel can in place on bottom shelf

Model Number	O.A. Dimensions W x D x H (Inches)	Weight (Pounds)
S-5481	15½ x 13 x 18¼	12

Unit is furnished with one s/s removable shelf. Canned fuel is not supplied.

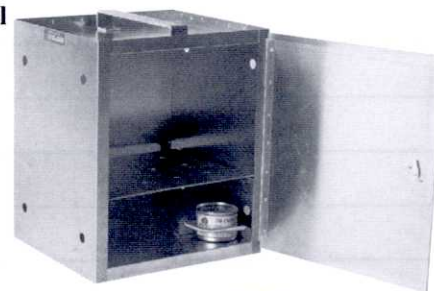

S-5481

Kitchen truck

- Indispensable for transporting large containers of hot food in kitchen areas.
- Two levels provide excellent flexibility.

A true back saver, this specially designed truck is a regular work horse in any kitchen. The lower deck has the height of a standard oven door and is engineered to take heavy containers from floor or ovens. The upper deck is at the counter level and can be used to transfer containers from stove to mixers.

The unit comes completely assembled with a push handle. Frame is 1"x1"x1/8" s/s angle. Upper & lower decks are 16 ga. s/s and are reinforced with 2" wide side braces. Vertical leg bumper on handle end and corner bumpers on opposite end of lower deck are standard. Two 5" swivel & two 8" wheels are also standard. Optional 8" casters are available.

Model Number	Deck size (inches)		O.A. Dimensions (Inches)			Weight Pounds
	Lower deck	Upper upper	W	L	H	
2049-2142	21x42	21x21	23	44 ¾	37	85



2049-2142


Subway grating

- 1" deep, all welded construction.
- Maximum lengths 20"/sections. (see note)
- Two (2) 3/8" dia. rods spaced 13/16" apart for 12" & 15" wide and three (3) rods for widths over 15".

Subway style floor grating provides sanitary, yet rugged covers for openings and troughs where a ledge or surface is available for its placement. These are made of stainless steel bars and rods. **Optional aluminum construction is also available.** Consult factory.

Model Number	Width (Inches)	Weight (lbs. Per Ft.)
GR-12	12	8.5
GR-15	15	10.5
GR-18	18	12
GR-21	21	14

NOTE: Lengths longer than 20", spacing other than 13/16" and shallow grating with 13/16" x 3/4" bars are also available. Consult factory.

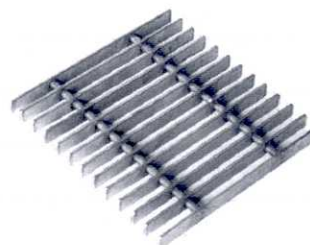

GR-12

Better food service equipment — standard models and custom designs.

H-5